

5 Port Solenoid Valve

Series VF1000/3000/5000

Reduced power consumption:



0.55 W [With power saving circuit]
[Starting 1.55 W Holding 0.55 W]

1.55 W [Standard]
(Conventional: 2.0 W) * With DC light

Power consumption is reduced by power saving circuit.

Power consumption is decreased by approx. 1/3 by reducing the wattage required to hold the valve in an energized state. (Effective energizing time is over 40 ms at 24 VDC.) Refer to electrical power waveform as shown below.

Electrical power waveform with power saving circuit

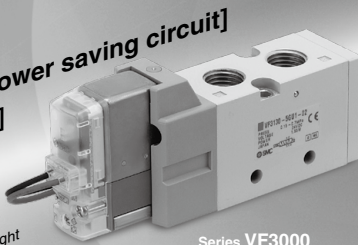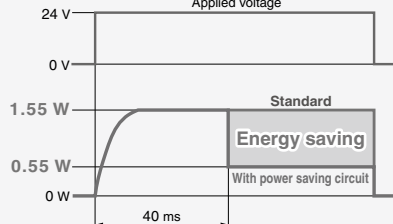

Series VF3000



RoHS

Low wattage specification added
* VF1000/3000

Power consumption **0.35 W** (Without light)
0.4 W (With light)



■ Built-in full-wave rectifier (AC)

● Noise reduction

Noise is considerably reduced by changing it to DC mode with a full-wave rectifier.


● Reduced apparent power

Conventional: 5.6 VA → **1.55 VA**


■ Built-in strainer in the pilot valve

Unexpected troubles due to foreign matter can be prevented.
(Note) Be sure to mount an air filter on the inlet side.

Rubber material: HNBR
Ozone-resistant specification
* The pilot valve poppet is made of FKM.

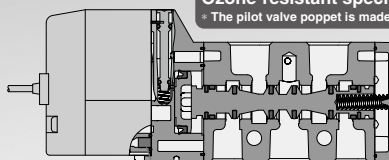

Strainer

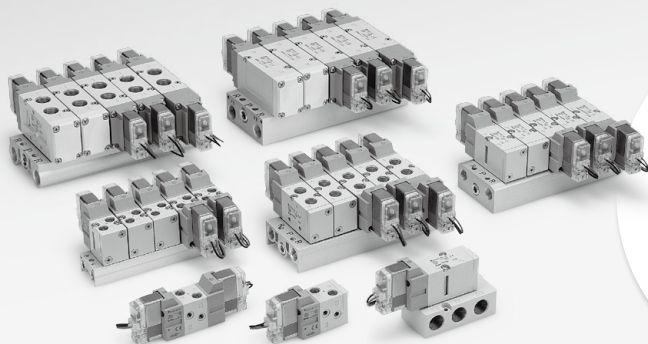















Air operated valve
VFA1000/3000/5000 (P2213-4)



SJ
SY
SY
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7

Model Selection by Operating Conditions 1

Solenoid Valve: Single Unit

Series	Sonic conductance C [dm ³ /(s·bar)]	Type of actuation	Port size	Voltage	Electrical entry	Light/Surge voltage suppressor	Manual override
Body ported	VF1000 	2-position single VF1000 (B)2 4(A) (EB)3 1 5(EA) (P) VF3000 VF5000 (A)4 2(B) (EA)5 1 3(EB) (P)	M5 x 0.8 1/8		Grommet 		
	VF3000 	2-position double VF1000 (B)2 4(A) (EB)3 1 5(EA) (P) VF3000 VF5000 (A)4 2(B) (EA)5 1 3(EB) (P)	1/8 1/4		L-type plug connector  M-type plug connector 		Non-locking push type 
	VF5000 	3-position closed center (A)4 2(B) (EA)5 1 3(EB) (P) 3-position exhaust center (A)4 2(B) (EA)5 1 3(EB) (P) 3-position pressure center (A)4 2(B) (EA)5 1 3(EB) (P)	1/4 3/8	12 VDC 24 VDC 24 VAC 100 VAC 200 VAC 110 VAC 220 VAC 240 VAC	DIN terminal 	DC ■ With surge voltage suppressor ■ With light/surge voltage suppressor ■ With surge voltage suppressor (Non-polar) ■ With light/surge voltage suppressor (Non-polar) AC ■ With light/surge voltage suppressor	Push-turn locking slotted type 
Base mounted	VF3000 	2-position single (A)4 2(B) (EA)5 1 3(EB) (P) 2-position double (A)4 2(B) (EA)5 1 3(EB) (P) 3-position closed center (A)4 2(B) (EA)5 1 3(EB) (P)	1/4 3/8		DIN (EN1753 01-803) terminal 		Push-turn locking lever type 
	VF5000 	3-position exhaust center (A)4 2(B) (EA)5 1 3(EB) (P) 3-position pressure center (A)4 2(B) (EA)5 1 3(EB) (P)	1/4 3/8 1/2		Conduit terminal 		

Page
808













Page
822

Low wattage specification page 833

Power consumption: 0.35 W (Without light) 0.4 W (With light)

Model Selection by Operating Conditions ②

Solenoid Valve: Manifold

Series	EXH port type	Manifold base model	Applicable valve	Applicable stations
Body ported	VF1000 	VV5F1-30 	VF1□30 VF1□33	2 to 20 stations
		VV5F1-31 		
	VF3000 	VV5F3-30 	VF3□30 VF3□33	2 to 20 stations
		VV5F5-20 		
Base mounted	VF5000 	VV5F5-21 	VF5□20 VF5□23	2 to 15 stations
		VV5F3-40 		
	VF3000 	VV5F5-40 	VF3□40 VF3□43	2 to 20 stations
		VV5F5-40 		

Page 837


Page 848

SJ
SY
SY
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7

Cylinder Speed Chart ①


Use as a guide for selection.
Please check the actual conditions with SMC
Model Selection Program.

Body Ported

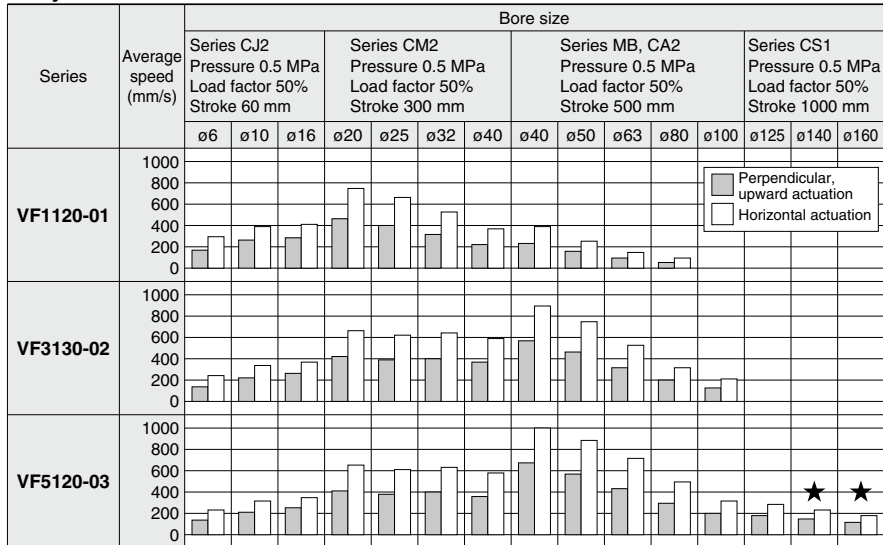

* With ★: when using steel piping

Base Mounted

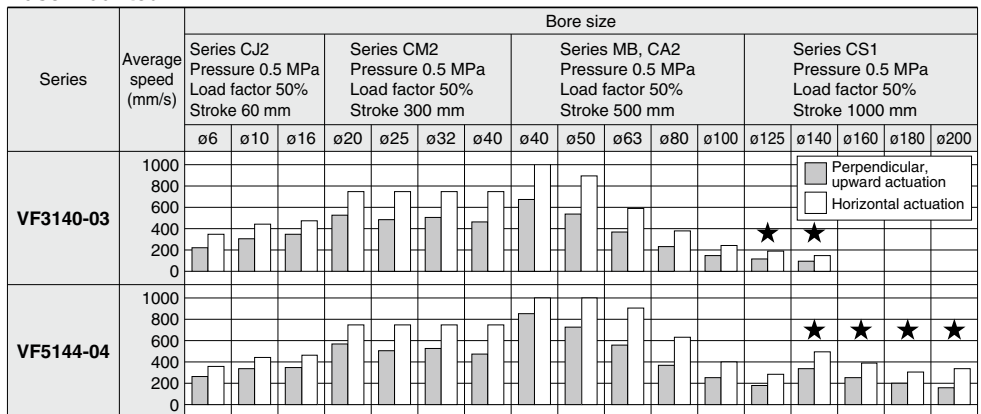

* With ★: when using steel piping

Cylinder Speed Chart ②

Use as a guide for selection.
Please check the actual conditions with SMC
Model Selection Program.

Conditions

Body Ported

Body ported		Series CJ2	Series CM2	Series MB, CA2	Series CS1
VF1120-01	Tubing x Length	T0604 x 1 m	T0806 x 1 m		—
	Speed controller	AS3002F-06	AS3002F-08		—
	Silencer	AN101-01			—
VF3130-02	Tubing x Length	T0604 x 1 m	T1075 x 1 m		—
	Speed controller	AS3002F-06	AS4002F-10		—
	Silencer	AN110-01			—
VF5120-03	Tubing x Length	T0604 x 1 m	T1075 x 1 m	T1209 x 1 m	
	Speed controller	AS3002F-06	AS4002F-10	AS4002F-12	
	Silencer	AN30-03			AN302-03

Body Ported [when using SGP (Steel Piping)]

	Body ported	Series CS1
VF5120-03	Tubing x Length	SGP10A x 1 m
	Speed controller	AS420-03
	Silencer	AN30-03

Base Mounted

Base mounted		Series CJ2	Series CM2	Series MB, CA2	Series CS1
VF3140-03	Tubing x Length	T0604 x 1 m	T1075 x 1 m	T1209 x 1 m	—
	Speed controller	AS3002F-06	AS4002F-10	AS4002F-12	—
	Silencer	AN30-03			—
VF5144-04	Tubing x Length	T0604 x 1 m	T1075 x 1 m	T1209 x 1 m	
	Speed controller	AS3002F-06	AS4002F-10	AS4002F-12	
	Silencer	AN40-04			

Base Mounted [when using SGP (Steel Piping)]

	Base mounted	Series CS1
VF3140-03	Tubing x Length	SGP10A x 1 m
	Speed controller	AS420-03
	Silencer	AN30-03
VF5144-04	Tubing x Length	SGP15A x 1 m
	Speed controller	AS420-04
	Silencer	AN40-04

Pilot Operated 5 Port Solenoid Valve

Series VF1000/3000/5000

Single Unit

Body Ported



Note) Only DIN and conduit terminal types are available with AC mode. Refer to the electrical entry for details.

RoHS

How to Order Valve

Body ported VF 3 1 3 0 — — — 5 G — — — 1-01 — — —

Series

1	VF1000
3	VF3000
5	VF5000

Type of actuation

1	2-position single
2	2-position double
3	3-position closed center
4	3-position exhaust center
5	3-position pressure center

* Only 1 and 2 are available with the VF1000.

Body model

Symbol	VF1000	VF3000	VF5000
2	○	—	○
3	—	○	—

Pressure specifications

Nil	Standard (0.7 MPa)
K	High-pressure type (1 MPa)

Body option

0: Pilot valve individual exhaust



PE port* EA/EB port

VF1000	VF3000	VF5000
○	○	○

3: Main/Pilot valve common exhaust



PE port EA/EB port

VF1000	VF3000	VF5000
—	○	○

* Refer to "Made to Order" (Page B21) when piping to PE port is required.

Coil specifications

Nil	Standard
T	With power saving circuit (DC only)

Note) Be sure to select the power saving circuit type when it is continuously energized for long periods of time. (Refer to page 858 for details.)

* T type is available with DC mode only. When T is selected, only Z type of light/surge voltage suppressor is available. (Note that when the electrical entry of DIN terminal type without connector is selected, only DOS and YOS are available.)

Rated voltage

DC		AC (50/60 Hz)	
5	24 VDC	1	100 VAC
6	12 VDC	2	200 VAC
		3	110 VAC [115 VAC]
		4	220 VAC [230 VAC]
		7	240 VAC
		B	24 VAC

Electrical entry

Grommet	L-type plug connector	M-type plug connector	DIN terminal (IP65 compatible)	DIN (EN175301-803) terminal (IP65 compatible)	Conduit terminal (IP65 compatible)
G: Lead wire length 300 mm H: Lead wire length 600 mm	L: With lead wire (length 300 mm)	M: With lead wire (length 300 mm)	D: With connector	Y: With connector	T: Conduit terminal
G: Lead wire length 300 mm H: Lead wire length 600 mm DC Without light/surge voltage suppressor	LN: Without lead wire	MN: Without lead wire	DO: Without connector	YO: Without connector	
	LO: Without connector	MO: Without connector			
CE	DC	CE	CE	CE	CE
compliant	AC	—	—	—	—

* LN and MN types are with 2 sockets.

* Refer to page 856 when different length of lead wire for L/M-type plug connector is required.

* Refer to page 857 for details on the DIN (EN175301-803) terminal.

Note 1) When using IP65, select the main/pilot valve common exhaust type. (Except VF1000)

Note 2) With the same specifications as the DC type, all electrical entries for the 24 VAC type are CE marking compliant.

808



Thread type



Nil	Rc
F	G
N	NPT
T	NPTF

* M5 is available with Nil only.

Bracket

Nil	Without bracket
F	With bracket

VF1000/3000
Single type
(The bracket cannot be connected after delivered.)



* Not available with the VF5000.

Made to Order

Nil	—
X500	Pilot exhaust port with piping thread (M3) specification (Refer to page 821.)
X600	TRIAC output specification (Refer to page 821.)

A, B port size

Symbol	Port size	VF1000	VF3000	VF5000
M5	M5 x 0.8	○	—	—
01	1/8	○	○	—
02	1/4	—	○	○
03	3/8	—	—	○

Manual override

Nil: Non-locking push type	D: Push-tum locking slotted type	E: Push-tum locking lever type

Light/Surge voltage suppressor

Symbol	Light/Surge voltage suppressor	DC	AC
Nil	Without light/surge voltage suppressor	○	○
S	With surge voltage suppressor	○	—(Not)
Z	With light/surge voltage suppressor	○	○
R	With surge voltage suppressor (Non-polar)	○	—
U	With light/surge voltage suppressor (Non-polar)	○	—

Note) S type is not available with AC mode, since a rectifier prevents surge voltage generation.


* In the DIN terminal type, since a light is installed in the connector, DOZ, DOU, YOZ, YOU are not available.



Caution
When using the surge voltage suppressor type, residual voltage will remain. Refer to page 858 for details.

Pilot Operated 5 Port Solenoid Valve Body Ported/Single Unit *Series VF1000/3000/5000*

Specifications



Model			VF1000	VF3000	VF5000
Fluid			Air		
Operating pressure range (MPa)	Standard	2-position single/3-position	0.15 to 0.7		
		2-position double	0.1 to 0.7		
	High-pressure type	2-position single/3-position	0.15 to 1.0		
		2-position double	0.1 to 1.0		
Ambient and fluid temperature (°C)			-10 to 50 (No freezing)		
Max. operating frequency (Hz)	2-position single/double		10	10	5
	3-position		—	3	3
Manual override			Non-locking push type Push-turn locking slotted type Push-turn locking lever type		
Pilot exhaust type			Individual exhaust, Main/Pilot valve common exhaust (Except VF1000)		
Lubrication			Not required		
Mounting orientation			Unrestricted		
Impact/Vibration resistance (m/s ²) <small>(Note)</small>			300/50		
Enclosure			Dustproof (IP65* for D, Y, T)		

Note) Impact resistance: No malfunction occurred when it is tested in the axial direction and at the right angles to the main valve and armature in both energized and de-energized states every once for each condition. (Values at the initial period)

Vibration resistance: No malfunction occurred in a one-sweep test between 45 and 2000 Hz. Test was performed at both energized and de-energized states in the axial direction and at the right angles to the main valve and armature. (Values at the initial period)

* Based on IEC 60529. When using IP65, select the main/pilot valve common exhaust type.

Solenoid Specifications



Made to Order
(Refer to page 821 for details.)

Symbol	Specification
X500	Pilot exhaust port with piping thread (M3) specification
X600	TRIAC output specification

Electrical entry		Grommet (G), (H)		DIN terminal (D)		
		L-type plug connector (L)		DIN (EN175301-803) terminal (Y)		
		M-type plug connector (M)		Conduit terminal (T)		
		G, H, L, M		D, Y, T		
Coil rated voltage (V)		DC	24, 12			
		AC (50/60 Hz)	24, 100, 110, 200, 220, 240			
Allowable voltage fluctuation		±10% of rated voltage*				
Power consumption (W)	DC	Standard	1.5 (With light: 1.55)		1.5 (With light: 1.75)	
		With power saving circuit	0.55 ^(Note) (With light only) [Starting 1.55 Holding 0.55]		0.75 ^(Note) (With light only) [Starting 1.75 Holding 0.75]	
Apparent power (VA)*	AC	24 V	1.5 (With light: 1.55)		1.5 (With light: 1.75)	
		100 V	1.55 (With light: 1.65)		1.55 (With light: 1.7)	
		110 V [115 V]				
		200 V				
		220 V [230 V]				
		240 V				
Surge voltage suppressor		Diode (Non-polar type: Varistor)				
Indicator light		LED (Neon light is used for AC mode of D, Y, T.)				

* It is in common between 110 VAC and 115 VAC, and between 220 VAC and 230 VAC.

* Allowable voltage fluctuation is -15% to +5% of the rated voltage for 115 VAC or 230 VAC.

* Since voltage drop due to the internal circuit in S, Z, T types (with power saving circuit), the allowable voltage fluctuation should be within the following range.

24 VDC: -7% to +10% 12 VDC: -4% to +10%

Note) Refer to page 858 for details.

Response Time

Series	Type of actuation		Pressure specifications	Operating pressure range (MPa)	Response time (ms) (at 0.5 MPa)				
					Without light/surge voltage suppressor	With light/surge voltage suppressor		AC	
						S, Z type	R, U type		
VF1000	2-position	Single	Standard	0.15 to 0.7	20	45	23	45	
		Double		0.1 to 0.7	12	12	12	12	
		Single	High-pressure type	0.15 to 1.0	23	48	26	48	
		Double		0.1 to 1.0	15	15	15	15	
VF3000	2-position	Single	Standard	0.15 to 0.7	20	45	23	45	
		Double		0.1 to 0.7	12	12	12	12	
	3-position			0.15 to 0.7	30	55	33	55	
	2-position	Single		High-pressure type	0.15 to 1.0	23	48	26	48
		Double	0.1 to 1.0		15	15	15	15	
	3-position		0.15 to 1.0	33	58	36	58		
VF5000	2-position	Single	Standard	0.15 to 0.7	30	55	33	55	
		Double		0.1 to 0.7	15	15	15	15	
	3-position			0.15 to 0.7	50	75	53	75	
	2-position	Single		High-pressure type	0.15 to 1.0	33	58	36	58
		Double	0.1 to 1.0		18	18	18	18	
	3-position		0.15 to 1.0		53	78	56	78	

Note) Based on dynamic performance test, JIS B 8375-1981. (Coil temperature: 20°C, at rated voltage)

Series VF1000/3000/5000

Flow-rate Characteristics/Weight



Valve model	Type of actuation		Port size		Flow-rate characteristics ^{Note 1)}						Weight (g) ^{Note 2)}		
			1, 4, 2 (P, A, B)	5, 3 (EA, EB)	1 → 4/2 (P → A/B)			4/2 → 5/3 (A/B → EA/EB)			Grommet	DIN terminal	
					C [dm³/ (s·bar)]	b	Cv	C [dm³/ (s·bar)]	b	Cv			
VF1□20-M5	2-position	Single	M5 x 0.8		0.49	0.40	0.13	0.52	0.35	0.13	140	176	
		Double			0.49	0.40	0.13	0.52	0.35	0.13	200	272	
VF1□20-01	2-position	Single	1/8	M5 x 0.8	0.76	0.22	0.17	0.53	0.28	0.13	136	172	
		Double			0.76	0.22	0.17	0.53	0.28	0.13	196	268	
VF3□30-01	2-position	Single	1/8		3.0	0.38	0.78	2.8	0.30	0.67	182	218	
		Double			3.0	0.38	0.78	2.8	0.30	0.67	243	315	
	3-position	Closed center			2.4	0.31	0.64	1.8	0.37	0.46	260	332	
		Exhaust center			2.6	0.37	0.70	3.0 [2.5]	0.32 [0.28]	0.76 [0.62]	260	332	
		Pressure center			3.0 [1.4]	0.42 [0.44]	0.83 [0.39]	2.4	0.27	0.59	260	332	
VF3□30-02	2-position	Single	1/4	1/8	4.0	0.36	1.0	3.1	0.32	0.75	178	214	
		Double			4.0	0.36	1.0	3.1	0.32	0.75	239	311	
	3-position	Closed center			2.4	0.45	0.68	1.9	0.37	0.47	256	328	
		Exhaust center			3.0	0.42	0.82	3.1 [2.7]	0.36 [0.29]	0.79 [0.66]	256	328	
		Pressure center			5.5 [1.4]	0.37 [0.50]	1.4 [0.40]	2.6	0.32	0.64	256	328	
VF5□20-02	2-position	Single	1/4		7.1	0.46	1.9	7.7	0.51	2.2	313	349	
		Double			7.1	0.46	1.9	7.7	0.51	2.2	368	440	
	3-position	Closed center			6.7	0.46	1.8	6.6	0.41	1.8	406	478	
		Exhaust center			7.1	0.42	1.9	8.0 [7.4]	0.45 [0.47]	2.2 [2.1]	406	478	
		Pressure center			6.8 [2.7]	0.51 [0.50]	2.0 [0.78]	5.7	0.37	1.4	406	478	
VF5□20-03	2-position	Single	3/8		8.8	0.44	2.4	10.0	0.49	2.9	299	335	
		Double			8.8	0.44	2.4	10.0	0.49	2.9	354	426	
	3-position	Closed center			7.5	0.43	2.0	7.5	0.38	1.9	391	463	
		Exhaust center			8.3	0.40	2.2	10.0 [8.7]	0.48 [0.46]	3.0 [2.4]	391	463	
		Pressure center			9.2 [3.0]	0.50 [0.49]	2.6 [0.85]	6.1	0.35	1.6	391	463	

Note 1) [] : Normal position
 Note 2) Values without bracket


Construction: Body Ported

2-position single


Symbol
2-position single



VF1000







VF3000/5000




2-position double

Symbol
2-position single

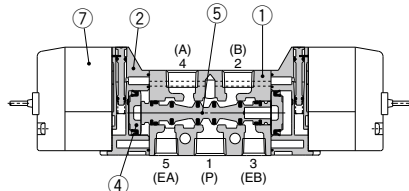

3-position closed center/exhaust center/pressure center



Symbol
3-position closed center



3-position exhaust center



3-position pressure center

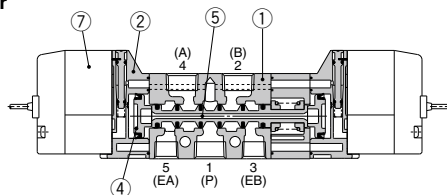

(Drawing shows a closed center type.)

Component Parts

No.	Description	Material	Note
1	Body	Aluminum die-casted	White
2	Adapter plate	Resin	Gray
3	End plate	Resin (VF313□-F : Aluminum die-casted) VF1120-F : Aluminum die-casted	White
4	Piston	Resin	
5	Spool valve	Aluminum, HNBFR	
6	Spring	Stainless steel	

Replacement Parts

No.	Description	Part no.	Note
7	Pilot valve assembly	Refer to "How to Order Pilot Valve Assembly" on page 812.	Built-in strainer

Bracket Assembly Part No.

Description	Part no.
Bracket (for VF1000 double)	DXT144-8-1A (With 2 mounting screws)

Series VF1000/3000/5000

How to Order Pilot Valve Assembly (With a gasket and two mounting screws)

Caution


When only the pilot valve assembly is replaced, it is not possible to change from V211 (Grommet or L/M-type) to V212 (DIN or Conduit type), or vice versa.

Valve model: VF□□□□□□-5GZ□1-□□□

* Select from the below in accordance with the valve used.

Grommet or L/M-type

V 2 1 1 □ □ - 5 G Z



		DC	AC
Nil	Without light/surge voltage suppressor	<input type="radio"/>	<input type="radio"/>
S	With surge voltage suppressor	<input type="radio"/>	<input type="radio"/>
Z	With light/surge voltage suppressor	<input type="radio"/>	<input type="radio"/>
R	With surge voltage suppressor (Non-polar)	<input type="radio"/>	<input type="radio"/>
U	With light/surge voltage suppressor (Non-polar)	<input type="radio"/>	<input type="radio"/>

Note) S type is not available with AC mode, since a rectifier prevents surge voltage generation. When T is selected, only Z type of light/surge voltage suppressor is available.

Caution


When using the surge voltage suppressor type, residual voltage will remain. Refer to page 858 for details.

Electrical entry

G	Grommet (Lead wire length 300 mm)	
H	Grommet (Lead wire length 600 mm)	
L	L-type plug connector	With lead wire
LN		Without lead wire
LO		Without connector
M		With lead wire
MN	M-type plug connector	Without lead wire
MO		Without connector

* LN and MN types are with 2 sockets.
* Refer to page 856 when different length of lead wire for L/M-type plug connector is required.

DIN or Conduit type



V 2 1 2 □ □ - 5

Pressure specifications

Nil	Standard (0.7 MPa)
K	High-pressure type (1 MPa)

Coil specifications

Nil	Standard
T	With power saving circuit (DC only)

* T type is available with DC mode only.

Rated voltage

DC	
5	24 VDC
6	12 VDC
AC (50/60 Hz)	
1	100 VAC
2	200 VAC
3	110 VAC [115 VAC]
4	220 VAC [230 VAC]
7	240 VAC
B	24 VAC

Caution

For V212 (DIN or Conduit type), the coil specifications and voltage (including light/surge voltage suppressor) cannot be changed by replacing the pilot valve assembly.

Caution


Tightening torque of the pilot valve assembly mounting screw

M2.5: 0.32 N-m


Dimensions: Series VF1000/Body Ported

2-position single


Grommet (G) (H): VF1120-□^G□□1-M5□(-F)

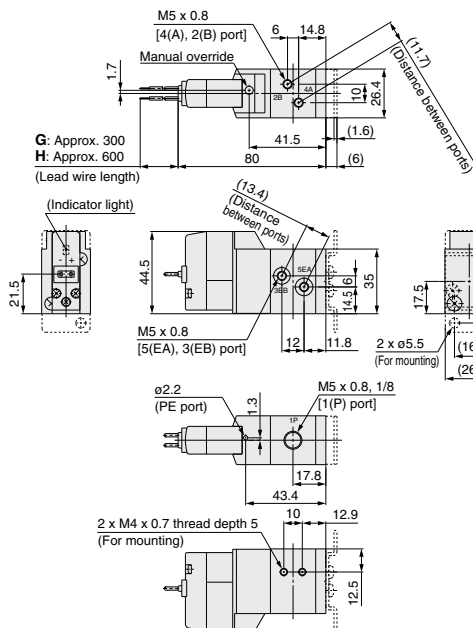


Grommet (G) (H): VF1120-□^G□□1-01□(-F)

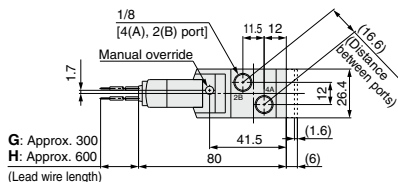


Grommet (G) (H)
DC without light/surge voltage suppressor



L-type plug connector (L): VF1120-□^L□□1-M5□(-F)




DIN terminal (D) (Y): VF1120-□^D□□1-M5□(-F)

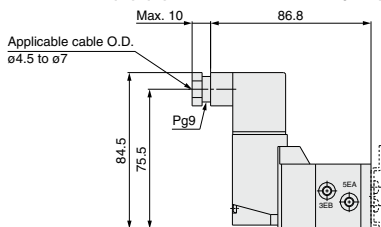


Unless otherwise indicated, dimensions are the same as Grommet (G).

Unless otherwise indicated, dimensions are the same as Grommet (G).

M-type plug connector (M): VF1120-□^M□□1-M5□(-F)



Conduit terminal (T): VF1120-□^T□□1-M5□(-F)

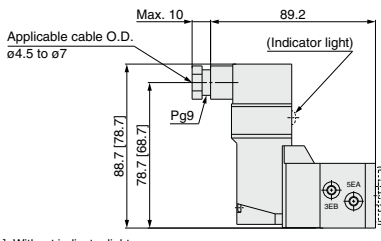




[] : Without indicator light
Unless otherwise indicated, dimensions are the same as Grommet (G).

Unless otherwise indicated, dimensions are the same as Grommet (G).

Dimensions: Series VF3000/Body Ported


2-position single

Grommet (G) (H): VF3130-□_G□_H□1.01□ (-F)

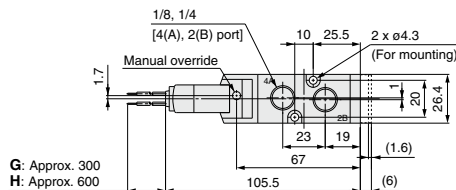


Grommet (G) (H)

DC without light/surge voltage suppressor

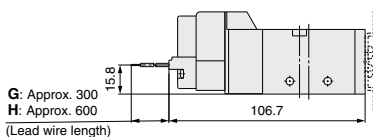


L-type plug connector (L): VF3130-□_L□1.01□ (-F)

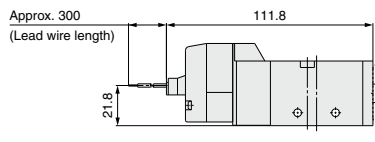


Unless otherwise indicated, dimensions are the same as Grommet (G).

M-type plug connector (M): VF3130-□_M□1.01□ (-F)




Unless otherwise indicated, dimensions are the same as Grommet (G).

DIN terminal (D) (Y): VF3130-□_D□1.01□ (-F)

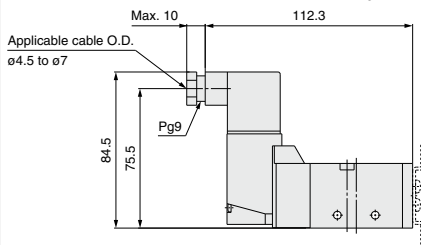

Unless otherwise indicated, dimensions are the same as Grommet (G).

Conduit terminal (T): VF3130-□_T□1.01□ (-F)

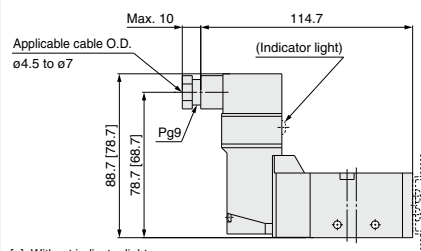



[] : Without indicator light
Unless otherwise indicated, dimensions are the same as Grommet (G).

Series VF1000/3000/5000

Dimensions: Series VF3000/Body Ported


2-position double

Grommet (G) (H): VF3230-□^G_H□□1-01□□

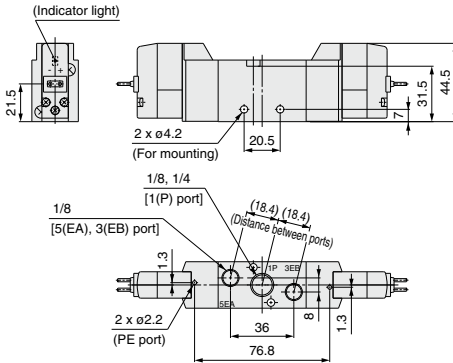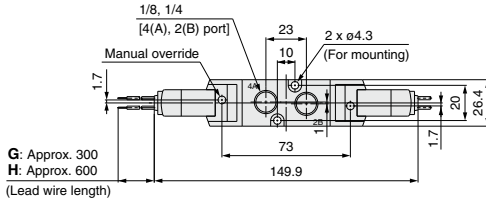


Grommet (G) (H)

DC without light/surge voltage suppressor

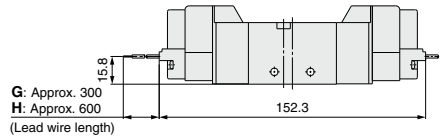


L-type plug connector (L): VF3230-□L□□1-01□□

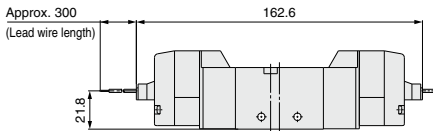


Unless otherwise indicated, dimensions are the same as Grommet (G).

M-type plug connector (M): VF3230-□M□□1-01□□




Unless otherwise indicated, dimensions are the same as Grommet (G).

DIN terminal (D) (Y): VF3230-□^D_Y□□1-01□□

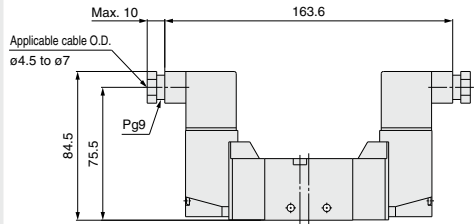

Unless otherwise indicated, dimensions are the same as Grommet (G).

Conduit terminal (T): VF3230-□T□□1-01□□


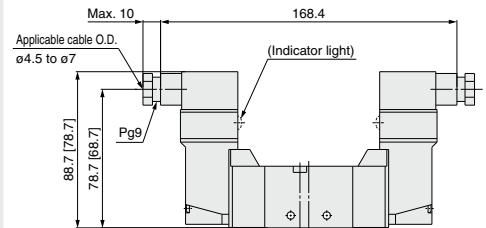


[]: Without indicator light


Unless otherwise indicated, dimensions are the same as Grommet (G).

3-position closed center/exhaust center/pressure center


Grommet (G) (H): VF3₄³30-G1-⁰¹₀₂

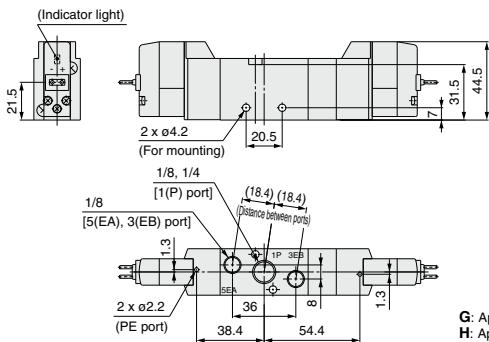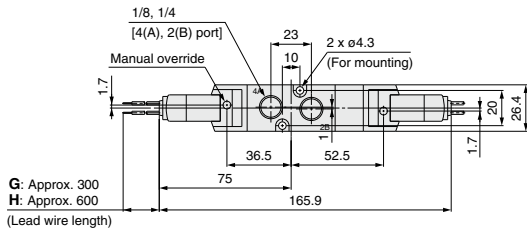

Grommet (G) (H)
DC without light/surge voltage suppressor

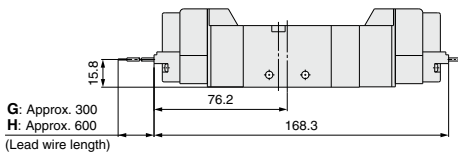


L-type plug connector (L): VF3³₄30-□L□□1-⁰¹₀₂□

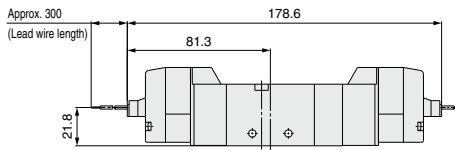


Unless otherwise indicated, dimensions are the same as Grommet (G).

M-type plug connector (M): VF₃³₄⁵30-□M□□1-⁰¹₀₂□




Unless otherwise indicated, dimensions are the same as Grommet (G).

DIN terminal (D) (Y): VF3³₄30-□^D_Y□□1-⁰¹₀₂□

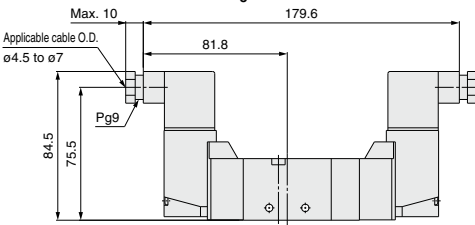

Unless otherwise indicated, dimensions are the same as Grommet (G).

Conduit terminal (T): VF³₄30-□T□□1-⁰¹₀₂□

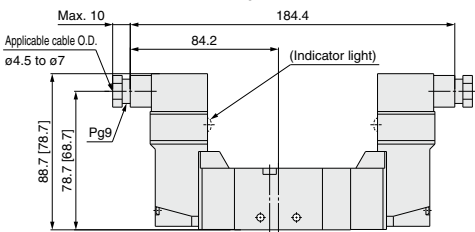

[]: Without indicator light
Unless otherwise indicated, dimensions are the same as Grommet (G).

SJ
SY
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7

Series VF1000/3000/5000

Dimensions: Series VF5000/Body Ported




2-position single

Grommet (G) (H): VF5120-□^G□□1-02□₀₃

G: Approx. 300

H: Approx. 600

(Lead wire length)

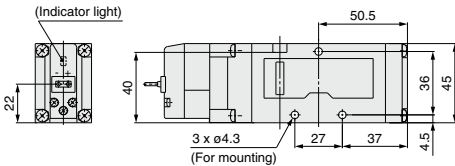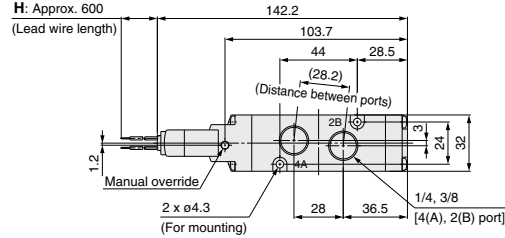


Grommet (G) (H)

DC without light/surge voltage suppressor

G: Approx. 300

H: Approx. 600


(Lead wire length)



L-type plug connector (L): VF5120-□^L□□1-02□₀₃


Approx. 300

(Lead wire length)




Unless otherwise indicated, dimensions are the same as Grommet (G).

M-type plug connector (M): VF5120-□^M□□1-02□₀₃




Unless otherwise indicated, dimensions are the same as Grommet (G).

DIN terminal (D) (Y): VF5120-□^D□□1-02□₀₃

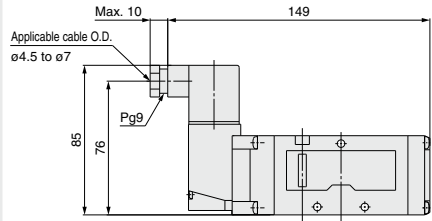

Unless otherwise indicated, dimensions are the same as Grommet (G).

Conduit terminal (T): VF5120-□^T□□1-02□₀₃

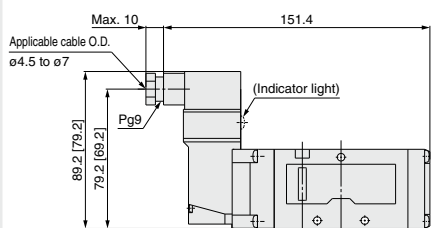

[]: Without indicator light

Unless otherwise indicated, dimensions are the same as Grommet (G).

Dimensions: Series VF5000/Body Ported


2-position double

Grommet (G) (H): VF5220-□^G□□1-02□₀₃


G: Approx. 300

H: Approx. 600

(Lead wire length)

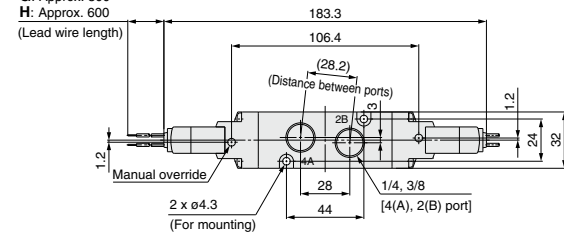

(Indicator light)

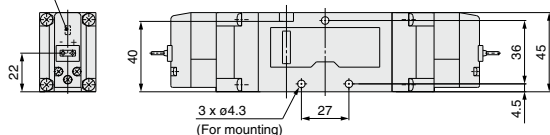


Grommet (G) (H)

DC without light/surge voltage suppressor

G: Approx. 300

H: Approx. 600


(Lead wire length)




L-type plug connector (L): VF5220-□^L□□1-02□₀₃

Approx. 300

(Lead wire length)

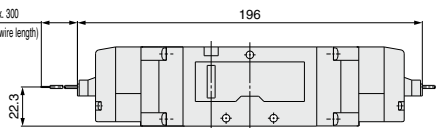


DIN terminal (D) (Y): VF5220-□^D□□1-02□₀₃

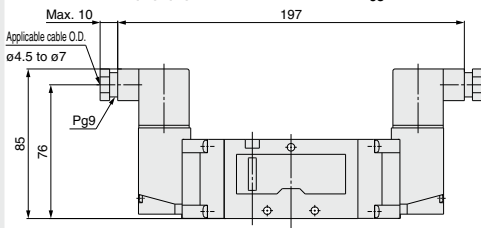


Unless otherwise indicated, dimensions are the same as Grommet (G).

Unless otherwise indicated, dimensions are the same as Grommet (G).

M-type plug connector (M): VF5220-□^M□□1-02□₀₃

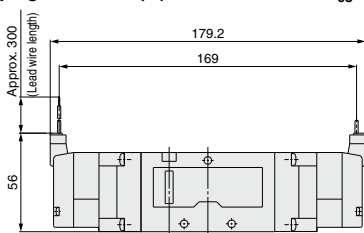

Conduit terminal (T): VF5220-□^T□□1-02□₀₃

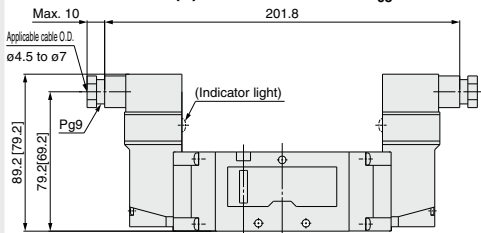

[]: Without indicator light

Unless otherwise indicated, dimensions are the same as Grommet (G).

Unless otherwise indicated, dimensions are the same as Grommet (G).

Series VF1000/3000/5000




Dimensions: Series VF5000/Body Ported

3-position closed center/exhaust center/pressure center

Grommet (G) (H): VF5³₄20-□G□□1-⁰²₀₃□

G: Approx. 300

H: Approx. 600

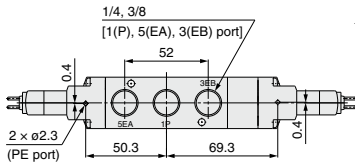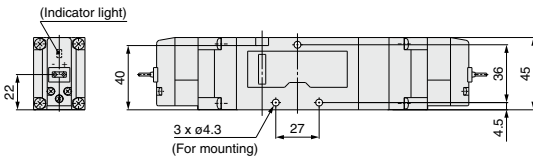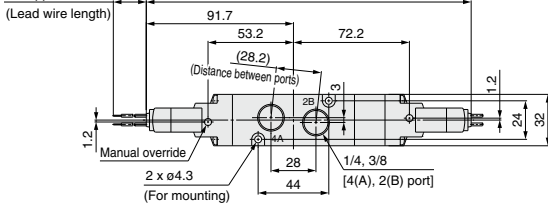


Grommet (G) (H)

DC without light/surge voltage suppressor


G: Approx. 300

H: Approx. 600

(Lead wire length)

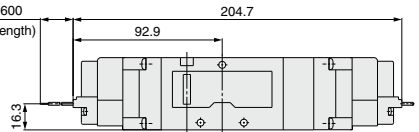


L-type plug connector (L): VF5³₄20-□L□□1-⁰²₀₃□

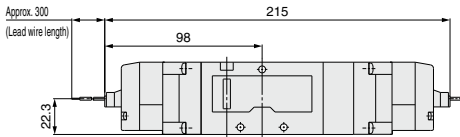


Unless otherwise indicated, dimensions are the same as Grommet (G).

M-type plug connector (M): VF5³₄20-□M□□1-⁰²₀₃□

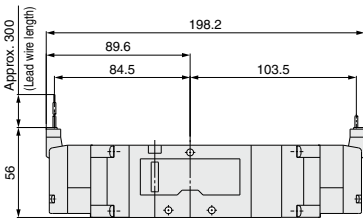


Unless otherwise indicated, dimensions are the same as Grommet (G).

DIN terminal (D) (Y): VF5³₄20-□D□□1-⁰²₀₃□

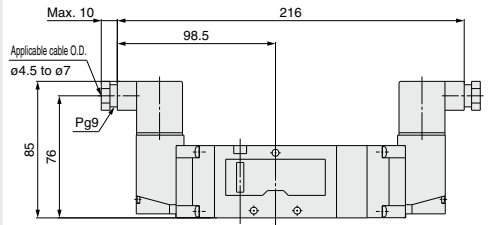

Unless otherwise indicated, dimensions are the same as Grommet (G).

Conduit terminal (T): VF5³₄20-□T□□1-⁰²₀₃□

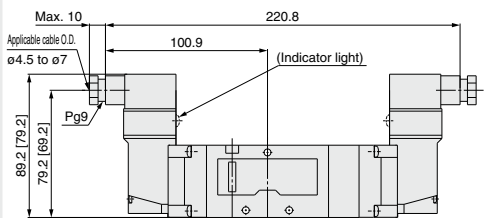

[]: Without indicator light

Unless otherwise indicated, dimensions are the same as Grommet (G).

1 Body Ported Pilot Exhaust Port with Piping Thread (M3) Specification

In this specification, piping to the pilot exhaust port (PE port) is available when the valve is used in an environment where the exhaust from the pilot valve is not allowable, or intrusion of ambient dust should be prevented. Combination with low wattage specification is not possible.

How to Order Valve

VF 3 3 0 - - - 1 - - - - X500

Series	
1	VF1000
3	VF3000
5	VF5000

Type of actuation

1	2-position single
2	2-position double
3	3-position closed center
4	3-position exhaust center
5	3-position pressure center


Body model

Symbol	VF1000	VF3000	VF5000
2	○	—	○
3	—	○	—


Note) Not available for the base mounted type.

• Entry is the same as standard products.
The specifications and performance are the same as those of standard products.


Pilot exhaust port (PE port)
M3 x 0.5




• 2-position single



• 2-position double



• 3-position closed center/exhaust center/pressure center

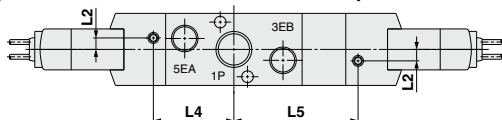

Series	L1	L2	L3	L4	L5
VF1000	34.5	4.2	33.4	—	—
VF3000	60	4.2	59	29.5	45.5
VF5000	95	3.45	89	44.5	63.5

2 TRIAC Output Specification

For AC type valve, use this specification when the pilot valve is not recovered even though valve power supply is turned OFF at the equipment using output unit with large leakage voltage over 8% of the rated voltage (TRIAC output such as PLC or SSR, etc.). Combination with low wattage specification is not possible.

How to Order Valve

VF 3 - - - - - 1 - - - - - X600

Series	
1	VF1000
3	VF3000
5	VF5000

Type of actuation

1	2-position single
2	2-position double
3	3-position closed center
4	3-position exhaust center
5	3-position pressure center

• Entry is the same as standard products.
Note) Rated voltage: AC type only

Pilot Operated 5 Port Solenoid Valve

Series VF3000/5000

Single Unit

Base Mounted



Note) Only DIN and conduit terminal types are available with AC mode. Refer to the electrical entry for details.

RoHS

How to Order Valve

Base mounted (VF1000: Not available)

Series

3	VF3000
5	VF5000

* Not available with the VF1000.

Type of actuation

1	2-position single
2	2-position double
3	3-position closed center
4	3-position exhaust center
5	3-position pressure center

Body model

Body option

0: Pilot valve individual exhaust

VF3000	VF5000
○	—

3: Main/Pilot valve common exhaust

VF3000	VF5000
○	—

4: Pilot valve base exhaust

VF3000	VF5000
—	○

Pressure specifications

Nil	Standard (0.7 MPa)
K	High-pressure type (1 MPa)

Coil specifications

Nil	Standard
T	With power saving circuit (DC only)

Note) Be sure to select the power saving circuit type when it is continuously energized for long periods of time. (Refer to page 858 for details.)

* T type is available with DC mode only. When T is selected, only Z type of light/surge voltage suppressor is available. (Note that when the electrical entry of DIN terminal type without connector is selected, only DOS and YOS are available.)

Rated voltage

DC	AC (50/60 Hz)	
5	1	100 VAC
2	2	200 VAC
3	3	110 VAC [115 VAC]
4	4	220 VAC [230 VAC]
7	7	240 VAC
B	24	24 VAC

Made to Order

Nil	—
X600	TRIAC output specification (Refer to page 821.)

Thread type

Nil	Rc
F	G
N	NPT
T	NPTF

Port size (Sub-plate)

Symbol	Port size	VF3000	VF5000
Nil	Without sub-plate	○	○
02	1/4	○	○
03	3/8	○	○
04	1/2	—	○

* Without the sub-plate, two mounting screws and a gasket are included.

Manual override

Nil: Non-locking push type	D: Push-tum locking slotted type	E: Push-tum locking lever type

Light/Surge voltage suppressor

Symbol	Light/Surge voltage suppressor	DC	AC
Nil	Without light/surge voltage suppressor	○	○
S	With surge voltage suppressor	○	—
Z	With light/surge voltage suppressor	○	○
R	With surge voltage suppressor (Non-polar)	○	—
U	With light/surge voltage suppressor (Non-polar)	○	—

Electrical entry

Grommet	L-type plug connector	M-type plug connector	DIN terminal	DIN terminal (EN175301-803)	Conduit terminal
G: Lead wire length 300 mm H: Lead wire length 600 mm	L: With lead wire (length 300 mm)	M: With lead wire (length 300 mm)	D: With connector	Y: With connector	T: Conduit terminal
G: Lead wire length 300 mm H: Lead wire length 600 mm DC Without light/surge voltage suppressor	LN: Without lead wire	MN: Without lead wire	DO: Without connector	YO: Without connector	
LO: Without connector	MO: Without connector				
CE DC	CE	CE	CE	CE	CE
compliant AC (Note 2)	—	—	CE	CE	CE

Note) S type is not available with AC mode, since a rectifier prevents surge voltage generation.

* In the DIN terminal type, since a light is installed in the connector, DOZ, DOU, YOZ, YOU are not available.

Caution

When using the surge voltage suppressor type, residual voltage will remain. Refer to page 858 for details.

* LN and MN types are with 2 sockets.


* Refer to page 856 when different length of lead wire for L/M-type plug connector is required.

* Refer to page 857 for details on the DIN (EN175301-803) terminal. Note 1) When using IP65, select the main/pilot valve common exhaust type or pilot valve base exhaust type.


Note 2) With the same specifications as the DC type, all electrical entries for the 24 VAC type are CE marking compliant.

Pilot Operated 5 Port Solenoid Valve Base Mounted/Single Unit *Series VF3000/5000*

Specifications



Series VF3000



Series VF5000



Made to Order
(Refer to page 821 for details.)

Symbol	Specification
X600	TRIAC output specification

Model			VF3000	VF5000
Fluid			Air	
Operating pressure range (MPa)	Standard	2-position single/3-position	0.15 to 0.7	
		2-position double	0.1 to 0.7	
	High-pressure type	2-position single/3-position	0.15 to 1.0	
		2-position double	0.1 to 1.0	
Ambient and fluid temperature (°C)			-10 to 50 (No freezing)	
Max. operating frequency (Hz)	2-position single/double		10	5
	3-position		3	3
Manual override			Non-locking push type Push-turn locking slotted type Push-turn locking lever type	
Pilot exhaust type			Individual exhaust, Main/ Pilot valve common exhaust	Pilot valve base exhaust
Lubrication			Not required	
Mounting orientation			Unrestricted	
Impact/Vibration resistance (m/s²) <small>(Note)</small>			300/50	
Enclosure			Dustproof (IP65* for D, Y, T)	

(Note) Impact resistance: No malfunction occurred when it is tested in the axial direction and at the right angles to the main valve and armature in both energized and de-energized states every once for each condition. (Values at the initial period)

Vibration resistance: No malfunction occurred in a one-sweep test between 45 and 2000 Hz. Test was performed at both energized and de-energized states in the axial direction and at the right angles to the main valve and armature. (Values at the initial period)

* Based on IEC 60529. When using IP65, select the main/pilot valve common exhaust type or pilot valve base exhaust type.

Solenoid Specifications

Electrical entry		Grommet (G), (H) L-type plug connector (L) M-type plug connector (M)	DIN terminal (D) DIN (EN175301-803) terminal (Y) Conduit terminal (T)
		G, H, L, M	D, Y, T
Coil rated voltage (V)	DC	24, 12	
	AC (50/60 Hz)	24, 100, 110, 200, 220, 240	
Allowable voltage fluctuation		±10% of rated voltage*	
Power consumption (W)	DC	Standard	1.5 (With light: 1.55)
		With power saving circuit	0.55 ^(Note) (With light only) [Starting 1.55 Holding 0.55]
		24 V	1.5 (With light: 1.55)
Apparent power (VA)*	AC	100 V	1.5 (With light: 1.75)
		110 V [115 V]	
		200 V	1.55 (With light: 1.65)
		220 V [230 V]	1.55 (With light: 1.7)
		240 V	
Surge voltage suppressor		Diode (Non-polar type: Varistor)	
Indicator light		LED (Neon light is used for AC mode of D, Y, T.)	

* It is in common between 110 VAC and 115 VAC, and between 220 VAC and 230 VAC.

* Allowable voltage fluctuation is -15% to +5% of the rated voltage for 115 VAC or 230 VAC.

* Since voltage drops due to the internal circuit in S, Z, T types (with power saving circuit), the allowable voltage fluctuation should be within the following range.

24 VDC: -7% to +10% 12 VDC: -4% to +10%

(Note) Refer to page 858 for details.

Response Time

Series	Type of actuation		Pressure specifications	Operating pressure range (MPa)	Response time (ms) (at 0.5 MPa)			
					Without light/surge voltage suppressor	With light/surge voltage suppressor		AC
						S, Z type	R, U type	
VF1000	2-position	Single	Standard	0.15 to 0.7	20	45	23	45
		Double		0.1 to 0.7	12	12	12	12
		Single	High-pressure type	0.15 to 1.0	23	48	26	48
		Double		0.1 to 1.0	15	15	15	15
VF3000	2-position	Single	Standard	0.15 to 0.7	20	45	23	45
		Double		0.1 to 0.7	12	12	12	12
	3-position		High-pressure type	0.15 to 0.7	30	55	33	55
	2-position	Single		0.15 to 1.0	23	48	26	48
		Double		0.1 to 1.0	15	15	15	15
	3-position			0.15 to 1.0	33	58	36	58
VF5000	2-position	Single	Standard	0.15 to 0.7	30	55	33	55
		Double		0.1 to 0.7	15	15	15	15
	3-position		High-pressure type	0.15 to 0.7	50	75	53	75
	2-position	Single		0.15 to 1.0	33	58	36	58
		Double		0.1 to 1.0	18	18	18	18
	3-position			0.15 to 1.0	53	78	56	78

(Note) Based on dynamic performance test, JIS B 8375-1981. (Coil temperature: 20°C, at rated voltage)



Flow-rate Characteristics/Weight

Valve model	Type of actuation		Port size	Flow-rate characteristics <small>Note 1)</small>						Weight (g) <small>Note 2)</small>	
				1 → 4/2 (P → A/B)			4/2 → 5/3 (A/B → EA/EB)			Grommet	DIN terminal
				C [dm ³ /s-bar]	b	Cv	C [dm ³ /s-bar]	b	Cv		
VF3□40-02	2-position	Single	1/4	2.8	0.14	0.64	2.5	0.18	0.57	344 (192)	380 (228)
		Double		2.8	0.14	0.64	2.5	0.18	0.57	405 (252)	477 (324)
	3-position	Closed center		2.1	0.22	0.49	1.6	0.26	0.41	422 (270)	494 (342)
		Exhaust center		2.3	0.21	0.53	2.8 [2.1]	0.23 [0.26]	0.66 [0.50]	422 (270)	494 (342)
		Pressure center		2.9 [1.1]	0.16 [0.45]	0.67 [0.32]	2.1	0.23	0.49	422 (270)	494 (342)
VF3□40-03	2-position	Single	3/8	3.1	0.24	0.76	2.6	0.23	0.62	327 (192)	363 (228)
		Double		3.1	0.24	0.76	2.6	0.23	0.62	388 (252)	460 (324)
	3-position	Closed center		2.2	0.33	0.57	1.6	0.34	0.40	405 (270)	477 (342)
		Exhaust center		2.6	0.27	0.61	2.8 [2.3]	0.30 [0.28]	0.68 [0.55]	405 (270)	477 (342)
		Pressure center		3.4 [1.3]	0.29 [0.48]	0.80 [0.38]	2.2	0.31	0.52	405 (270)	477 (342)
VF5□44-02	2-position	Single	1/4	7.3	0.49	2.1	7.3	0.50	2.0	486 (297)	522 (333)
		Double		7.3	0.49	2.1	7.3	0.50	2.0	541 (352)	613 (424)
	3-position	Closed center		6.6	0.35	1.7	6.3	0.31	1.6	578 (390)	650 (462)
		Exhaust center		7.4	0.33	1.9	8.1 [7.4]	0.35 [0.34]	2.1 [1.9]	578 (390)	650 (462)
		Pressure center		8.0 [2.9]	0.35 [0.48]	2.1 [0.85]	5.6	0.31	1.5	578 (390)	650 (462)
VF5□44-03	2-position	Single	3/8	8.4	0.34	2.2	8.9	0.29	2.3	473 (297)	509 (333)
		Double		8.4	0.34	2.2	8.9	0.29	2.3	529 (352)	601 (424)
	3-position	Closed center		7.3	0.34	2.0	7.1	0.28	1.8	566 (390)	638 (462)
		Exhaust center		8.1	0.27	2.0	14.0 [8.3]	0.26 [0.31]	3.4 [2.2]	566 (390)	638 (462)
		Pressure center		8.1 [2.5]	0.33 [0.48]	2.0 [0.74]	5.7	0.31	1.4	566 (390)	638 (462)
VF5□44-04	2-position	Single	1/2	9.4	0.43	2.7	12.0	0.32	3.0	545 (297)	581 (333)
		Double		9.4	0.43	2.7	12.0	0.32	3.0	600 (352)	672 (424)
	3-position	Closed center		7.1	0.41	2.1	7.4	0.32	2.0	638 (390)	710 (462)
		Exhaust center		8.6	0.39	2.4	13.0 [8.9]	0.21 [0.40]	3.1 [2.5]	638 (390)	710 (462)
		Pressure center		11.0 [2.6]	0.18 [0.47]	2.6 [0.78]	6.1	0.35	1.6	638 (390)	710 (462)


Note 1) []: Normal position

Note 2)): Values without sub-plate


Construction: Base Mounted

VF3000/5000


Symbol
2-position single




2-position single

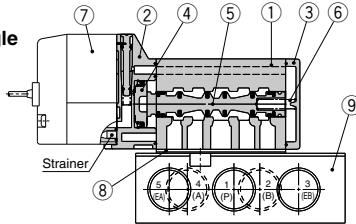


Symbol
2-position double




2-position double

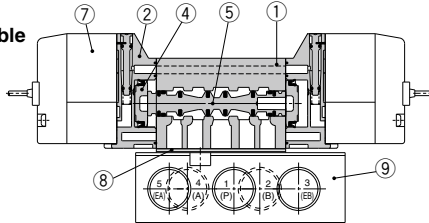

Symbol
3-position closed center




3-position closed center/exhaust center/pressure center

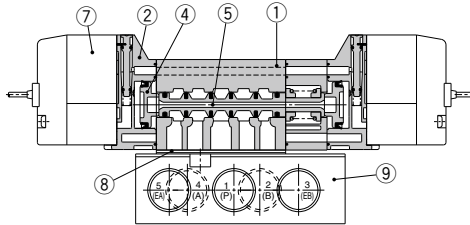

3-position exhaust center



3-position pressure center



(Drawing shows a closed center type.)

Sub-plate part no.

VF 3 000-71-1

Series

3	VF3000
5	VF5000

Thread type

NII	Rc
F	G
N	NPT
T	NPTF

Port size

Symbol	Port size	VF3000	VF5000
1	1/4	○	○
2	3/8	○	○
3	1/2	—	○

Component Parts

No.	Description	Material	Note
1	Body	Aluminum die-casted	White
2	Adapter plate	Resin	Gray
3	End plate	Resin	White
4	Piston	Resin	
5	Spool valve	Aluminum, HNBR	
6	Spring	Stainless steel	

Replacement Parts

No.	Description	Part no.		Note
		VF3000	VF5000	
7	Pilot valve assembly	Refer to "How to Order Pilot Valve Assembly" on page 826.		Built-in strainer
8	Gasket	DXT031-30-11	DXT156-9-8	HNBR
9	Sub-plate	1/4: VF3000-71-1□ 3/8: VF3000-71-2□	1/4: VF5000-71-1□ 3/8: VF5000-71-2□ 1/2: VF5000-71-3□	Aluminum die-casted
—	Round head combination screw (1 pc.)	DXT031-44-1 (M4 x 39.5, With spring washer)	—	For mounting valve
—	Hexagon socket head cap screw (1 pc.)	—	AXT620-32-1 (M4 x 48, With spring washer)	For mounting valve

Caution

**Tightening Torque
for Mounting Valve**

M4: 1.4 N·m

How to Order Pilot Valve Assembly (With a gasket and two mounting screws)

Caution


When only the pilot valve assembly is replaced, it is not possible to change from V211 (Grommet or L/M-type) to V212 (DIN or Conduit type), or vice versa.

Valve model: VF□□□□□□-5GZ□1-□□□

* Select from the below in accordance with the valve used.

Grommet or L/M-type

V 2 1 1 □ □ - 5 G Z



Light/Surge voltage suppressor

		DC	AC
Nil	Without light/surge voltage suppressor	<input type="radio"/>	<input type="radio"/>
S	With surge voltage suppressor	<input type="radio"/>	<input type="radio"/>
Z	With light/surge voltage suppressor	<input type="radio"/>	<input type="radio"/>
R	With surge voltage suppressor (Non-polar)	<input type="radio"/>	<input type="radio"/>
U	With light/surge voltage suppressor (Non-polar)	<input type="radio"/>	<input type="radio"/>

Note) S type is not available with AC mode, since a rectifier prevents surge voltage generation. When T is selected, only Z type of light/surge voltage suppressor is available.

Caution


When using the surge voltage suppressor type, residual voltage will remain. Refer to page 858 for details.

Electrical entry

G	Grommet (Lead wire length 300 mm)
H	Grommet (Lead wire length 600 mm)
L	L-type plug connector
LN	Without lead wire
LO	Without connector
M	With lead wire
MN	Without lead wire
MO	Without connector

* LN and MN types are with 2 sockets.
* Refer to page 856 when different length of lead wire for L/M-type plug connector is required.

DIN or Conduit type



V 2 1 2 □ □ - 5

Pressure specifications

Nil	Standard (0.7 MPa)
K	High-pressure type (1 MPa)

Coil specifications

Nil	Standard
T	With power saving circuit (DC only)

* T type is available with DC mode only.

Rated voltage

DC	
5	24 VDC
6	12 VDC
AC (50/60 Hz)	
1	100 VAC
2	200 VAC
3	110 VAC [115 VAC]
4	220 VAC [230 VAC]
7	240 VAC
B	24 VAC

Caution

For V212 (DIN or Conduit type), the coil specifications and voltage (including light/surge voltage suppressor) cannot be changed by replacing the pilot valve assembly.


Caution

Tightening torque of the pilot valve assembly mounting screw
M2.5: 0.32 N·m


Dimensions: Series VF3000/Base Mounted

2-position single


Grommet (G) (H): VF3140-□G□□1-02□□

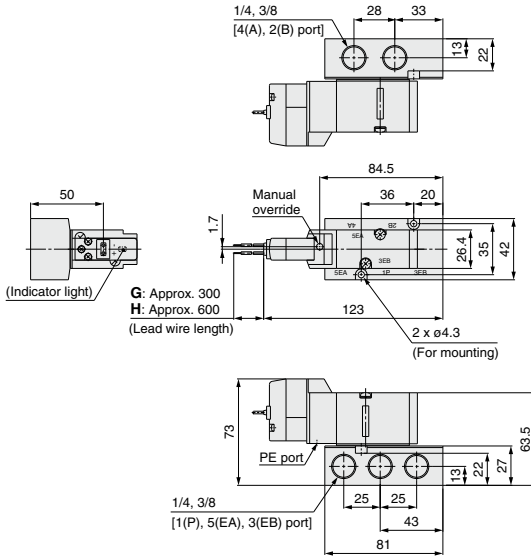

Grommet (G) (H)
DC without tight/surge voltage suppressor




L-type plug connector (L): VF3140-□L□□1-02□□




Unless otherwise indicated, dimensions are the same as Grommet (G).

M-type plug connector (M): VF3140-□M□□1-02□□




Unless otherwise indicated, dimensions are the same as Grommet (G).

DIN terminal (D) (Y): VF3140-□D□□1-02□□

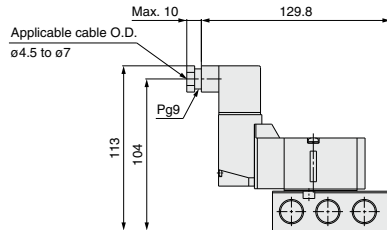

Unless otherwise indicated, dimensions are the same as Grommet (G).

Conduit terminal (T): VF3140-□T□□1-02□□

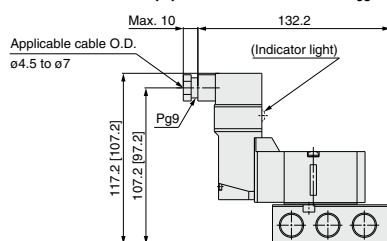

[] : Without indicator light
Unless otherwise indicated, dimensions are the same as Grommet (G).


SJ
SY
SY
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7

Series VF3000/5000


Dimensions: Series VF3000/Base Mounted

2-position double


Grommet (G) (H): VF3240-□G□□1-02□□

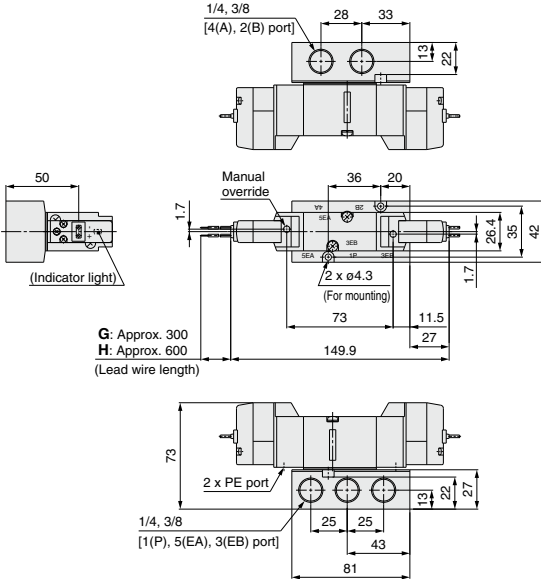

Grommet (G) (H) DC without light/surge voltage suppressor

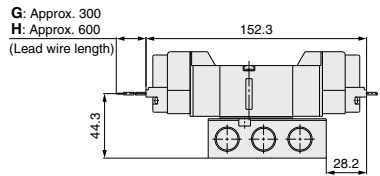


L-type plug connector (L): VF3240-□L□□1-02□□

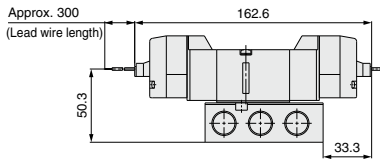


Unless otherwise indicated, dimensions are the same as Grommet (G).

M-type plug connector (M): VF3240-□M□□1-02□□




Unless otherwise indicated, dimensions are the same as Grommet (G).

DIN terminal (D) (Y): VF3240-□D□□1-02□□

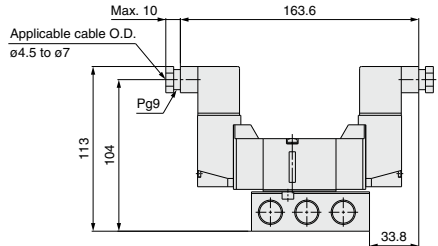

Unless otherwise indicated, dimensions are the same as Grommet (G).

Conduit terminal (T): VF3240-□T□□1-02□□

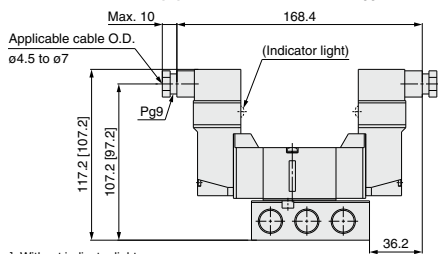


[] : Without indicator light

Unless otherwise indicated, dimensions are the same as Grommet (G).


Dimensions: Series VF3000/Base Mounted

3-position closed center/exhaust center/pressure center

Grommet (G) (H): VF3³/₅40-□G□□1-⁰²/₀₃□

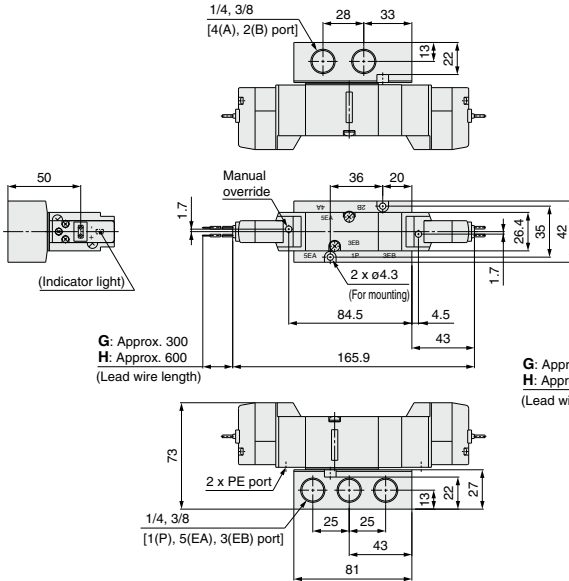


L-type plug connector (L): VF3³/₅40-□L□□1-⁰²/₀₃□

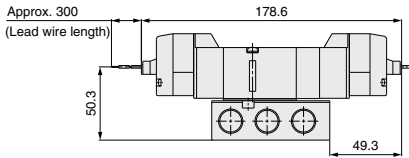


Unless otherwise indicated, dimensions are the same as Grommet (G).

M-type plug connector (M): VF3³/₅40-□M□□1-⁰²/₀₃□




Unless otherwise indicated, dimensions are the same as Grommet (G).

DIN terminal (D) (Y): VF3³/₅40-□D□□1-⁰²/₀₃□

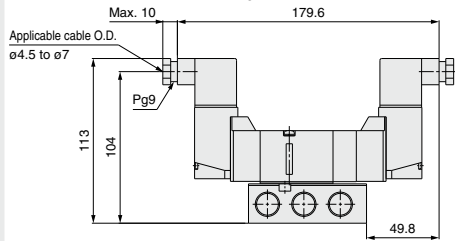

Unless otherwise indicated, dimensions are the same as Grommet (G).

Conduit terminal (T): VF3³/₅40-□T□□1-⁰²/₀₃□

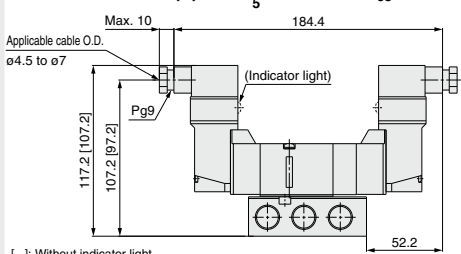


[]: Without indicator light
Unless otherwise indicated, dimensions are the same as Grommet (G).

Series VF3000/5000


Dimensions: Series VF5000/Base Mounted

2-position single

Grommet (G) (H): VF5144-□G□□1-⁰²₀₃□₀₄

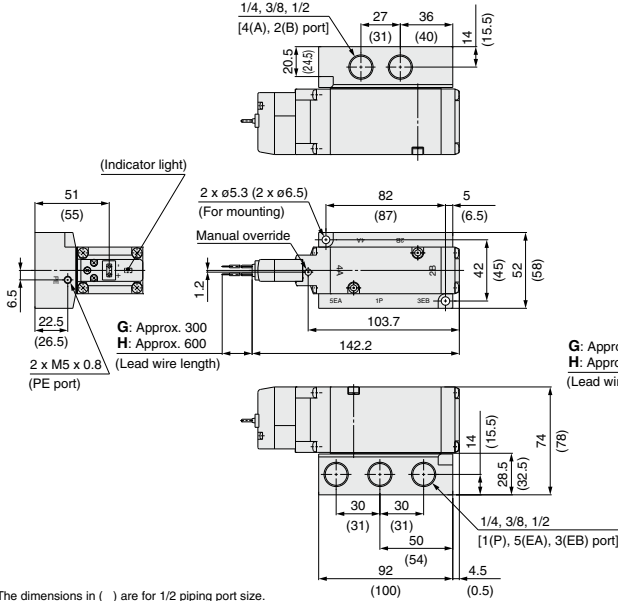


Grommet (G) (H) DC without light/surge voltage suppressor

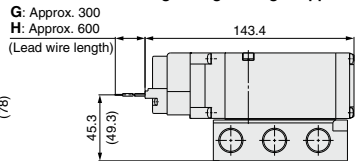


The dimensions in () are for 1/2 piping port size.

L-type plug connector (L): VF5144-□L□□1-⁰²₀₃□₀₄




Unless otherwise indicated, dimensions are the same as Grommet (G).
The dimensions in () are for 1/2 piping port size.

M-type plug connector (M): VF5144-□M□□1-⁰²₀₃□₀₄




Unless otherwise indicated, dimensions are the same as Grommet (G).
The dimensions in () are for 1/2 piping port size.

DIN terminal (D) (Y): VF5144-□D□□1-⁰²₀₃□₀₄

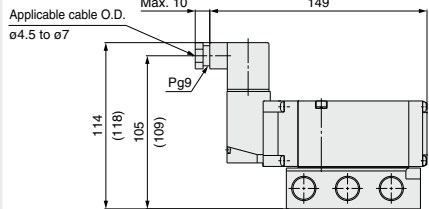

Unless otherwise indicated, dimensions are the same as Grommet (G).
The dimensions in () are for 1/2 piping port size.

Conduit terminal (T): VF5144-□T□□1-⁰²₀₃□₀₄

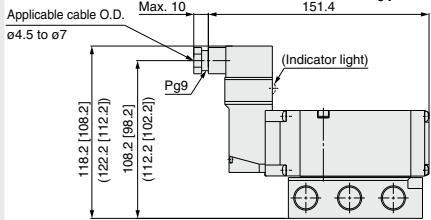


Unless otherwise indicated, dimensions are the same as Grommet (G).
[] : Without indicator light
The dimensions in () are for 1/2 piping port size.


Dimensions: Series VF5000/Base Mounted

2-position double

Grommet (G) (H): VF5244-□G□□1-⁰²₀₃⁰⁴

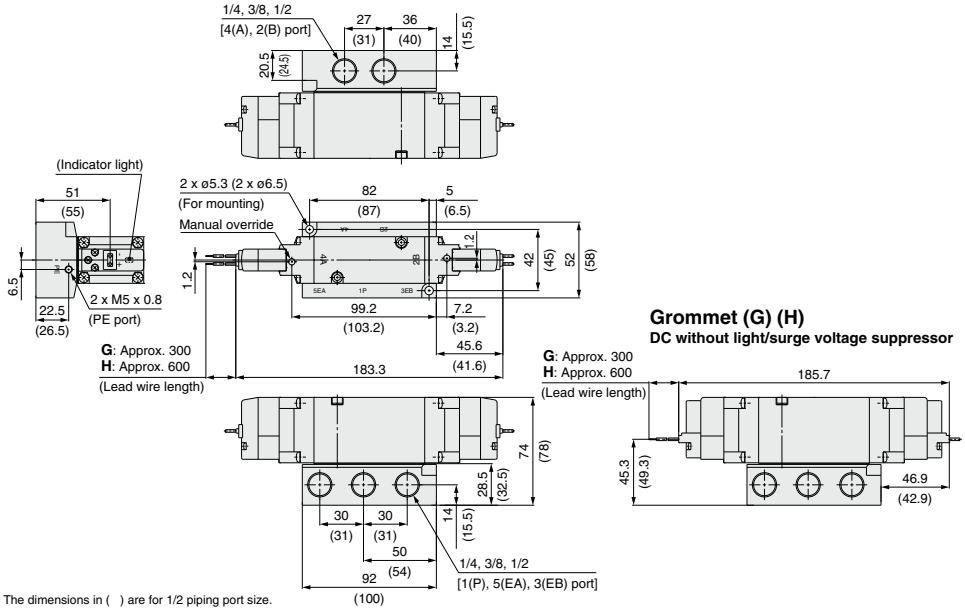


L-type plug connector (L): VF5244-□L□□1-⁰²₀₃⁰⁴

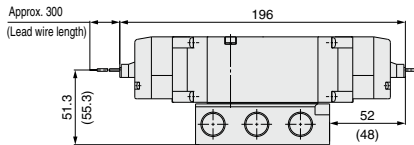


Unless otherwise indicated, dimensions are the same as Grommet (G).
The dimensions in () are for 1/2 piping port size.

M-type plug connector (M): VF5244-□M□□1-⁰²₀₃⁰⁴




Unless otherwise indicated, dimensions are the same as Grommet (G).
The dimensions in () are for 1/2 piping port size.

DIN terminal (D) (Y): VF5244-□D□□1-⁰²₀₃⁰⁴

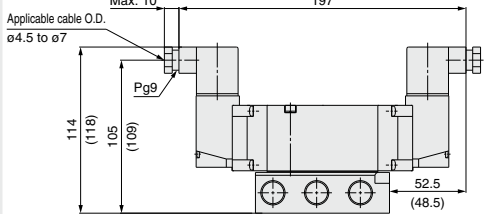


Unless otherwise indicated, dimensions are the same as Grommet (G).
The dimensions in () are for 1/2 piping port size.

Conduit terminal (T): VF5244-□T□□1-⁰²₀₃⁰⁴

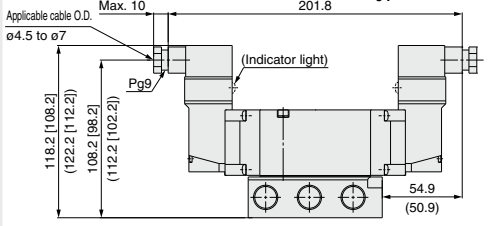

Unless otherwise indicated, dimensions are the same as Grommet (G).
[] : Without indicator light
The dimensions in () are for 1/2 piping port size.



Specifications

Model		VF1000	VF3000
Fluid		Air	
Internal pilot operating pressure range (MPa)	2-position single/3-position	0.15 to 0.7	
	2-position double	0.1 to 0.7	
Ambient and fluid temperature (°C)		-10 to 50 (No freezing)	
Max. operating frequency (Hz)	2-position single/double	5	5
	3-position	3	3
Manual override		Non-locking push type Push-turn locking slotted type Push-turn locking lever type	
Pilot exhaust type		Main/Pilot valve common exhaust	
Lubrication		Not required	
Mounting orientation		Unrestricted	
Impact/Vibration resistance (m/s ²) <small>Note)</small>		150/30	
Enclosure		Dustproof (IP65* for DIN terminal)	

* Based on IEC 60529.

Note) Impact resistance: No malfunction occurred when it is tested in the axial direction and at the right angles to the main valve and armature in both energized and de-energized states every once for each condition. (Values at the initial period)

Vibration resistance: No malfunction occurred in a one-sweep test between 45 and 2000 Hz. Test was performed at both energized and de-energized states in the axial direction and at the right angles to the main valve and armature. (Values at the initial period)

Solenoid Specifications

Electrical entry		Grommet (G), (H) L-type plug connector (L) M-type plug connector (M)	DIN terminal (D), (Y)
		G, H, L, M	D, Y
Coil rated voltage (V)	DC	24, 12	
	AC (50/60 Hz)	100, 110, 200, 220	
Allowable voltage fluctuation		±10% of rated voltage*	
Power consumption (W)		Standard	
Apparent power (VA)*	DC	0.35 (With light: 0.4 (With light of DIN terminal: 0.45))	
	100 V	0.78 (With light: 0.81)	0.78 (With light: 0.87)
	110 V [115 V]	0.86 (With light: 0.89) [0.94 (With light: 0.97)]	0.86 (With light: 0.97) [0.94 (With light: 1.07)]
	200 V	1.18 (With light: 1.22)	1.15 (With light: 1.30)
	220 V [230 V]	1.30 (With light: 1.34) [1.42 (With light: 1.46)]	1.27 (With light: 1.46) [1.39 (With light: 1.60)]
Surge voltage suppressor		Diode (DIN terminal, Non-polar type: Varistor)	
Indicator light		LED (Neon light is used for AC mode of DIN terminal.)	

* It is in common between 110 VAC and 115 VAC, and between 220 VAC and 230 VAC.


* Allowable voltage fluctuation is -15% to +5% of the rated voltage for 115 VAC or 230 VAC.

* Since voltage drops due to the internal circuit in S and Z types, the allowable voltage fluctuation should be within the following range.
24 VDC: -7% to +10%
12 VDC: -4% to +10%



Response Time

Series	Type of actuation	Response time (ms) (at 0.5 MPa)			
		Without light/surge voltage suppressor	With light/surge voltage suppressor		AC
VF1000	2-position single	45	55	45	45
	2-position double	12	12	12	12
	2-position single	55	63	55	50
VF3000	2-position double	14	14	14	16
	3-position	100	100	90	90

VF1000




DIN terminal (D) (Y)




Series VF1000/3000

Dimensions


VF3000

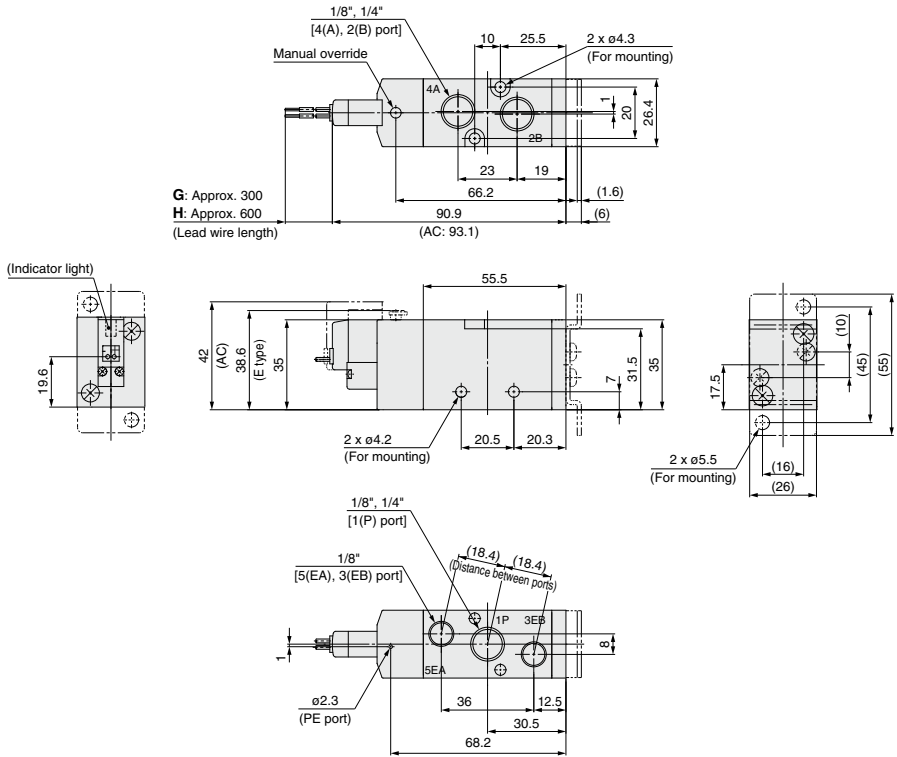


L-type plug connector (L)



M-type plug connector (M)



DIN terminal (D) (Y)



Pilot Operated 5 Port Solenoid Valve

Series VF1000/3000/5000

Manifold

Body Ported

How to Order Manifold



Note) Only DIN and conduit terminal types are available with AC mode.
Refer to the electrical entry for details.

Common exhaust

Series **VF5F** 1 - 30 - 04 1 -

Series	
1	VF1000
3	VF3000
5	VF5000

Manifold model

Symbol	P, R port size	VF1000	VF3000	VF5000
30	1/8	○	—	—
	1/4	—	○	—
20	3/8	—	—	○
21	1/2	—	—	○

* The A and B ports are made on the top.

Stations

02	2 stations
20	20 stations

* Up to 10 stations for VV5F5-20, and up to 15 stations for VV5F5-21.

Thread type

Nil	Rc
00F	G
00N	NPT
00T	NPTF

Individual exhaust (VF1000 only)

Series **VF5F1** - 31 - 04 3 -

Stations

02	2 stations
20	20 stations

Thread type

Nil	Rc
00F	G
00N	NPT
00T	NPTF

Manifold model

Symbol	P, R port size	EA, EB port size
31	1/8	M5

Note) When placing an order for body ported valve as a single unit, mounting screws for manifold and gasket are not attached. Order them separately, if necessary. (Refer to page 839 for details.)

How to Order Valve

* For low wattage specification, refer to "How to Order Valve" on page 833.

Series **VF** 3 1 3 0 - 5 G 1 - 01 -

Series	
1	VF1000
3	VF3000
5	VF5000

Type of actuation

1	2-position single
2	2-position double
3	3-position closed center
4	3-position exhaust center
5	3-position pressure center

* Only 1 and 2 are available with the VF1000.

Body option

0: Pilot valve individual exhaust	2: Main/Pilot valve common exhaust
PE port EA/EB port	PE port EA/EB port
VF1000 VF3000 VF5000	VF1000 VF3000 VF5000
○ ○ ○	○ ○ ○

Coil specifications

Nil	Standard
T	With power saving circuit (DC only)

Note) Be sure to select the power saving circuit type when it is continuously energized for long periods of time. (Refer to page 858 for details.)
* T type is available with DC mode only. When T is selected, only Z type of light/surge voltage suppressor is available. (Note that when the electrical entry of DIN terminal type without connector is available, only DOS and YOS are available.)

Pressure specifications

Nil	Standard (0.7 MPa)
K	High-pressure type (1 MPa)

Rated voltage

DC	AC (50/60 Hz)
5 24 VDC	1 100 VAC
6 12 VDC	2 200 VAC
	3 110 VAC [115 VAC]
	4 220 VAC [230 VAC]
	7 240 VAC
	B 24 VAC

Body model

Symbol	VF1000	VF3000	VF5000
2	—	—	—
3	○	○	○

Note) Manifold only.

Made to order

Refer to page 821 for details.
Combination with low wattage specification is not possible.


Thread type

Nil	Rc
F	G
N	NPT
T	NPTF


* M5 is available with Nil only.

Manual override


Nil: Non-locking push type



D: Push-turn locking slotted type



E: Push-turn locking lever type



Light/Surge voltage suppressor

Symbol	Light/Surge voltage suppressor	DC	AC
Nil	Without light/surge voltage suppressor	○	○
S	With surge voltage suppressor	○	Not available
Z	With light/surge voltage suppressor	○	○
R	With surge voltage suppressor (Non-polar)	○	—
U	With light/surge voltage suppressor (Non-polar)	○	—

Note) S type is not available with AC mode, since a rectifier prevents surge voltage generation.
* In the DIN terminal type, since a light is installed in the connector, DOZ, DOU, YOZ, YOU are not available.

Electrical entry

Grommet	L-type plug connector	M-type plug connector	DIN terminal	DIN (EN175301-803) terminal	Conduit terminal
 G: Lead wire length 300 mm H: Lead wire length 600 mm	 L: With lead wire (length 300 mm) LN: Without lead wire	 M: With lead wire (length 300 mm) MN: Without lead wire	 D: With connector DO: Without connector	 Y: With connector YO: Without connector	 T: Conduit terminal
CE DC	CE	CE	CE	CE	CE
compliant AC	—	—	—	—	—






* LN and MN types are with 2 sockets. * Refer to page 856 when different length of lead wire for L/M-type plug connector is required.
* Refer to page 857 for details on the DIN (EN175301-803) terminal.
Note 1) When using IP65, select the main/pilot valve common exhaust type.
Note 2) With the same specifications as the DC type, all electrical entries for the 24 VAC type are CE marking compliant.

Caution

When using the surge voltage suppressor type, residual voltage will remain. Refer to page 858 for details.


Series VF1000/3000/5000

Manifold Specifications


Series	VF1000		VF3000	VF5000	
Manifold base model	VV5F1-30 	VV5F1-31 	VV5F3-30 	VV5F5-21 	VV5F5-20 
	Common EXH	Individual EXH	Common EXH	Common EXH	Common EXH
	VF1□30 VF1□33		VF3□30 VF3□33	VF5□20 VF5□23	
	2 to 20 stations		2 to 20 stations	2 to 10 stations	2 to 15 stations
Manifold base Weight: W [g] Stations: n	W = 29n + 21	W = 51n + 35	W = 63n + 64	W = 97n + 80	W = 139n + 550

Note) Supply pressure to 1(P) ports and exhaust pressure from R ports on both sides for 10 stations or more (5 stations or more for the VF5000).

How to Order Manifold Assembly

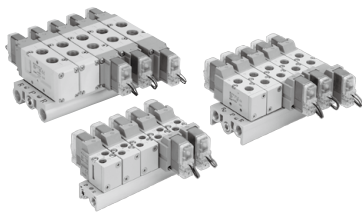

Example (VV5F3-30)

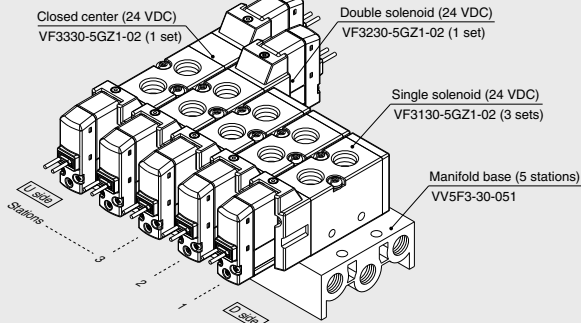

- VV5F3-30-051 1 set (Type 30, 5-station manifold base part no.)


 - * VF3130-5GZ1-02 3 sets (Single solenoid part no.)
 - * VF3230-5GZ1-02 1 set (Double solenoid part no.)
 - * VF3330-5GZ1-02 1 set (Closed center part no.)

→ The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

 - The valve arrangement is numbered as the 1st station from D side.
 - Under the manifold base part number, state the valves to be mounted in order from the 1st station as shown in the figure above. If the arrangement becomes complicated, specify on the manifold specification sheet.


Manifold Options

■ For body ported
Blanking plate assembly

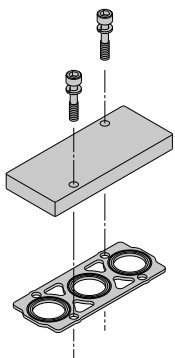


Series	Blanking plate assembly part no.
VF1000	DXT144-13-3A
VF3000	DXT031-38-5A
VF5000	VF5000-70-1A

■ Mounting screw, gasket part no.

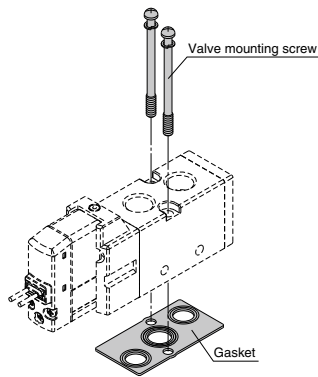

Series	Valve mounting screw (1 pc.)	Gasket
VF1000	Round head combination screw DXT031-44-1 (M4 x 39.5, With spring washer)	DXT144-12-2
VF3000		DXT155-25-7
VF5000	Hexagon socket head cap screw AXT620-32-1 (M4 x 48, With spring washer)	DXT156-9-6

■ Individual EXH spacer assembly

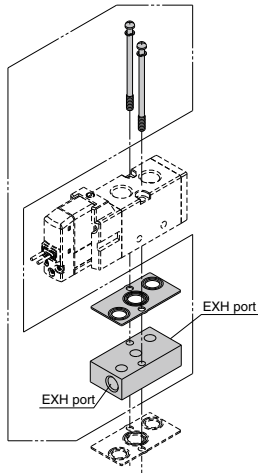

Caution

Tightening Torque for Mounting Screw

M4: 1.4 N·m

Warning

When mounting a valve or spacer on the manifold base or sub-plate, etc., the mounting orientation is already decided. If mounted in a wrong direction, the equipment to be connected may result in a malfunction. Refer to the dimensions for mounting.

VF 3 000-75-1 A

Series

Symbol	Series	Port size
3	VF3000	1/8
5	VF5000	1/4

Thread type


NII	Rc
F	G
N	NPT
T	NPTF

SJ
SY
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7



Series VF1000/3000/5000

Dimensions: Series VF1000

Type 30/VV5F1-30-□□1-□: Common exhaust
Grommet (G) (H)

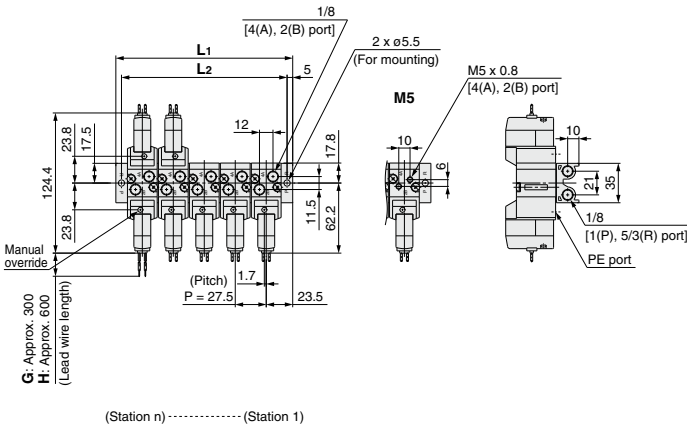

Grommet (G) (H)
DC without light/
surge voltage suppressor




L: Dimensions

n	2	3	4	5	6	7	8	9	10	11	12	13	14
L1	74.5	102	129.5	157	184.5	212	239.5	267	294.5	322	349.5	377	404.5
L2	64.5	92	119.5	147	174.5	202	229.5	257	284.5	312	339.5	367	394.5


n	15	16	17	18	19	20
L1	432	459.5	487	514.5	542	569.5
L2	422	449.5	477	504.5	532	559.5

L-type plug connector (L)




Unless otherwise indicated, dimensions are the same as Grommet (G).

M-type plug connector (M)




Unless otherwise indicated, dimensions are the same as Grommet (G).

DIN terminal (D) (Y)



Unless otherwise indicated, dimensions are the same as Grommet (G).

Conduit terminal (T)




[]: Without indicator light
Unless otherwise indicated, dimensions are the same as Grommet (G).

Series VF1000/3000/5000

Dimensions: Series VF3000

Type 30/VV5F3-30-□□1-□: Common exhaust
Grommet (G) (H)

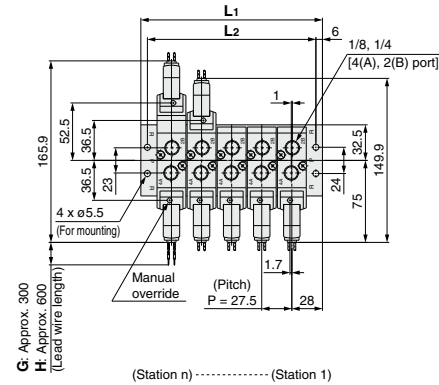


L: Dimensions

L: Dimensions

	n	2	3	4	5	6	7	8	9	10	11	12	13	14
L1		83.5	111	138.5	166	193.5	221	248.5	276	303.5	331	358.5	386	413.5
L2		71.5	99	126.5	154	181.5	209	236.5	264	291.5	319	346.5	374	401.5


	n	15	16	17	18	19	20
L1		441	468.5	496	523.5	551	578.5
L2		429	456.5	484	511.5	539	566.5

M-type plug connector (M)




Unless otherwise indicated, dimensions are the same as Grommet (G).

DIN terminal (D) (Y)




Unless otherwise indicated, dimensions are the same as Grommet (G).

Grommet (G) (H) DC without light/ surge voltage suppressor

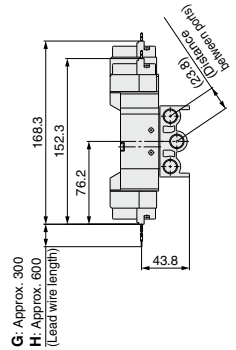


L-type plug connector (L)



Unless otherwise indicated, dimensions are the same as Grommet (G).


Conduit terminal (T)





[]: Without indicator light
Unless otherwise indicated, dimensions are the same as Grommet (G).

Dimensions: Series VF3000

Type 30/VV5F3-30-□□1-□: When the individual EXH spacer (VF3000-75-1A) is mounted.
Grommet (G) (H)

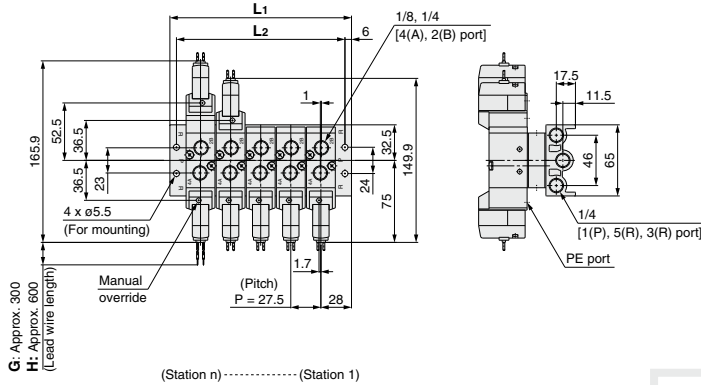

Grommet (G) (H)
DC without light/
surge voltage suppressor

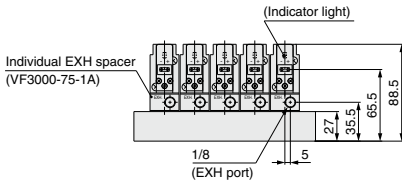


L: Dimensions

L	n	2	3	4	5	6	7	8	9	10	11	12	13	14
L1		83.5	111	138.5	166	193.5	221	248.5	276	303.5	331	358.5	386	413.5
L2		71.5	99	126.5	154	181.5	209	236.5	264	291.5	319	346.5	374	401.5

n: Stations


L	n	15	16	17	18	19	20
L1		441	468.5	496	523.5	551	578.5
L2		429	456.5	484	511.5	539	566.5

M-type plug connector (M)




Unless otherwise indicated, dimensions are the same as Grommet (G).

DIN terminal (D) (Y)



Unless otherwise indicated, dimensions are the same as Grommet (G).

Conduit terminal (T)




[]: Without indicator light
Unless otherwise indicated, dimensions are the same as Grommet (G).

SJ
SY
SY
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7


Series VF1000/3000/5000

Dimensions: Series VF5000

Type 20/VV5F5-20-□□1-□: Common exhaust
Grommet (G)

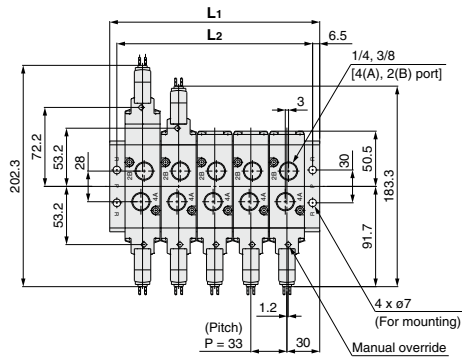


(Station n) (Station 1)



L: Dimensions


	n	2	3	4	5	6	7	8	9	10
L1	93	126	159	192	225	258	291	324	357	
L2	80	113	146	179	212	245	278	311	344	

M-type plug connector (M)




Unless otherwise indicated, dimensions are the same as Grommet (G).

DIN terminal (D) (Y)




Unless otherwise indicated, dimensions are the same as Grommet (G).

Grommet (G) (H) DC without light/ surge voltage suppressor




L-type plug connector (L)



Unless otherwise indicated, dimensions are the same as Grommet (G).


Conduit terminal (T)




[]: Without indicator light
Unless otherwise indicated, dimensions are the same as Grommet (G).

Dimensions: Series VF5000

Type 20/VV5F5-20-□□1-□: When the individual EXH spacer (VF5000-75-1A) is mounted.
Grommet (G)

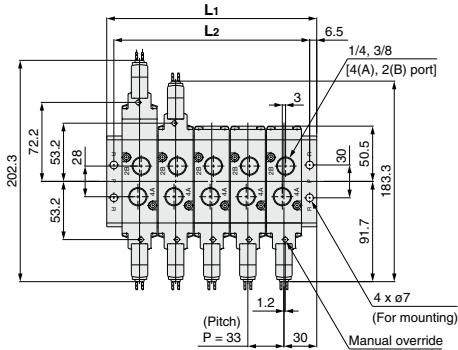

(Station n) (Station 1)

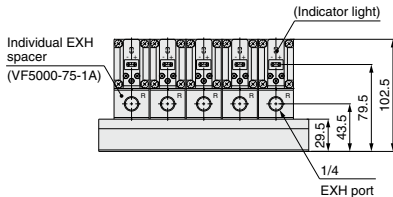


L: Dimensions

	n	2	3	4	5	6	7	8	9	10
L1	93	126	159	192	225	258	291	324	357	
L2	80	113	146	179	212	245	278	311	344	


n: Stations

M-type plug connector (M)




Unless otherwise indicated, dimensions are the same as Grommet (G).

DIN terminal (D) (Y)




Unless otherwise indicated, dimensions are the same as Grommet (G).

Conduit terminal (T)




[]: Without indicator light
Unless otherwise indicated, dimensions are the same as Grommet (G).

Grommet (G) (H) DC without light/ surge voltage suppressor



L-type plug connector (L)




Unless otherwise indicated, dimensions are the same as Grommet (G).

SJ
SY
SY
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7



Series VF1000/3000/5000

Dimensions: Series VF5000


Type 21/VV5F5-21-□□1-□: Common exhaust
Grommet (G)

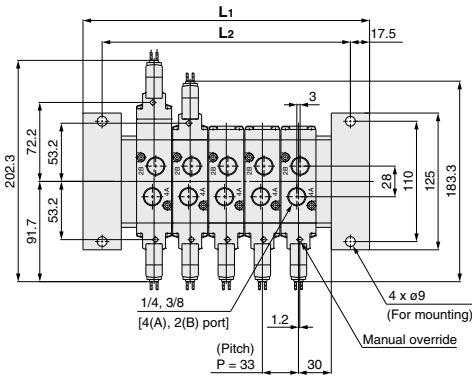

(Station n) (Station 1)

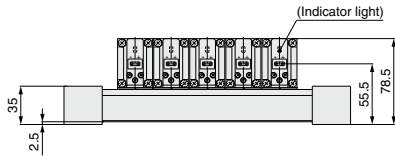

Grommet (G) (H)
DC without light/
surge voltage suppressor




L: Dimensions

	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L1	163	196	229	262	295	328	361	394	427	460	493	526	559	592
L2	128	161	194	227	260	293	326	359	392	425	458	491	524	557


n: Stations

M-type plug connector (M)




Unless otherwise indicated, dimensions are the same as Grommet (G).

DIN terminal (D) (Y)



Unless otherwise indicated, dimensions are the same as Grommet (G).


Conduit terminal (T)




[]: Without indicator light
Unless otherwise indicated, dimensions are the same as Grommet (G).

Dimensions: Series VF5000

Type 21/VV5F5-21-□□1-□: When the individual EXH spacer (VF5000-75-1A) is mounted.
Grommet (G)

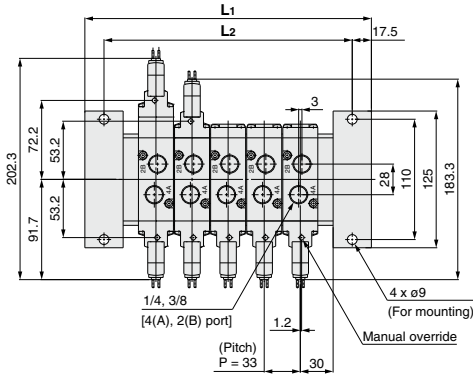

(Station n) (Station 1)

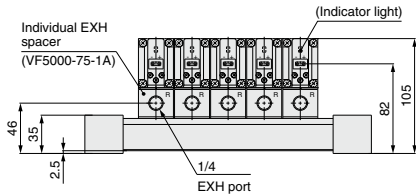


L: Dimensions


L: Dimensions														n: Stations	
$\backslash n$	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
L1	163	196	229	262	295	328	361	394	427	460	493	526	559	592	
L2	128	161	194	227	260	293	326	359	392	425	458	491	524	557	

Grommet (G) (H)

DC without light/
surge voltage suppressor

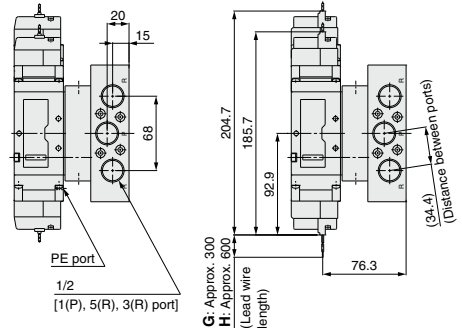


L-type plug connector (L)




Unless otherwise indicated, dimensions are the same as Grommet (G).

M-type plug connector (M)




Unless otherwise indicated, dimensions are the same as Grommet (G).

DIN terminal (D) (Y)



Unless otherwise indicated, dimensions are the same as Grommet (G).

Conduit terminal (T)



[]: Without indicator light
Unless otherwise indicated, dimensions are the same as Grommet (G).

Pilot Operated 5 Port Solenoid Valve

Series VF3000/5000

Manifold

Base Mounted

How to Order Manifold



Note) Only DIN and conduit terminal types are available with AC mode.
Refer to the electrical entry for details.

Common exhaust

VF5F 3 - 40 - 05 2 - 02 F

Symbol	Series	P, R port size	A, B port size
3	VF3000	1/4	1/4
5	VF5000	3/8	1/4

* The A and B ports are made on the bottom.

Stations	
02	2 stations
20	20 stations

* Up to 10 stations for VF5F5.

Thread type	
Nil	Rc
F	G
N	NPT
T	NPTF

How to Order Valve (With a gasket and two mounting screws)

* For low wattage specification, refer to "How to Order Valve" on page 833.

VF 3 1 4 0 - 5 G 1 -

Series	
3	VF3000
5	VF5000

* Not available with the VF1000.

Type of actuation	
1	2-position single
2	2-position double
3	3-position closed center
4	3-position exhaust center
5	3-position pressure center

Body model

Body option

0: Pilot valve individual exhaust



PE port EA/EB port

VF3000 VF5000

3: Main/Pilot valve common exhaust



PE port EA/EB port

VF3000 VF5000

4: Pilot valve base exhaust



PE port

VF3000 VF5000

Coil specifications

Nil	Standard
T	With power saving circuit (DC only)

Note) Be sure to select the power saving circuit type when it is continuously energized for long periods of time.

(Refer to page 858 for details.)
* T type is available with DC mode only. When T is selected, only Z type of light/surge voltage suppressor is available. (Note that when the electrical entry of DIN terminal type without connector is selected, only DO5 and YOS are available.)

Pressure specifications	
Nil	Standard (0.7 MPa)
K	High-pressure type (1 MPa)

Rated voltage

DC	AC (50/60 Hz)
5	24 VDC
6	12 VDC
1	100 VAC
2	200 VAC
3	110 VAC [115 VAC]
4	220 VAC [230 VAC]
7	240 VAC
B	24 VAC

Made to Order

Refer to page 821 for details.
Combination with low wattage specification is not possible.

Manual override

Nil: Non-locking push type	D: Push-turn locking slotted type	E: Push-turn locking lever type

Light/Surge voltage suppressor

Symbol	Light/Surge voltage suppressor	DC	AC
Nil	Without light/surge voltage suppressor	○	○
S	With surge voltage suppressor	○	—
Z	With light/surge voltage suppressor	○	○
R	With surge voltage suppressor (Non-polar)	○	—
U	With light/surge voltage suppressor (Non-polar)	○	—

Note) S type is not available with AC mode, since a rectifier prevents surge voltage generation.

* In the DIN terminal type, since a light is installed in the connector, DO2, DOU, YOZ, YOU are not available.

Caution

When using the surge voltage suppressor type, residual voltage will remain. Refer to page 858 for details.

Electrical entry

Grommet	L-type plug connector	M-type plug connector	DIN terminal	DIN (EN175301-803) terminal	Conduit terminal
G: Lead wire length 300 mm H: Lead wire length 600 mm	L: With lead wire (length 300 mm) LN: Without lead wire LO: Without connector	M: With lead wire (length 300 mm) MN: Without lead wire MO: Without connector	D: With connector DO: Without connector	Y: With connector YO: Without connector	T: Conduit terminal
CE DC	CE	CE	CE	CE	CE

* LN and MN types are with 2 sockets. * Refer to page 856 when different length of lead wire for L/M-type plug connector is required.

* Refer to page 857 for details on the DIN (EN175301-803) terminal.

Note 1) When using IP65, select the main/pilot valve common exhaust or pilot valve base exhaust type.


Note 2) With the same specifications as the DC type, all electrical entries for the 24 VAC type are CE marking compliant.

Manifold Specifications


Series	Manifold base model	EXH port type	Applicable valve model	Applicable stations	Manifold base Weight: W [g] Stations: n
VF3000	VV5F3-40	Common EXH	VF3□40 VF3□43	2 to 20 stations	W = 110n + 116
VF5000	VV5F5-40	Common EXH	VF5□44	2 to 10 stations	W = 161n + 128

(Note) Supply pressure to 1(P) ports and exhaust pressure from R ports on both sides for 10 stations or more (5 stations or more for the VF5000).

How to Order Manifold Assembly

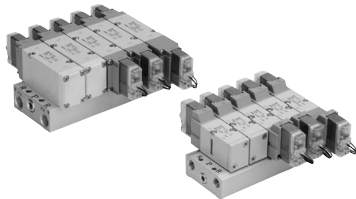

Example (VV5F3-40)

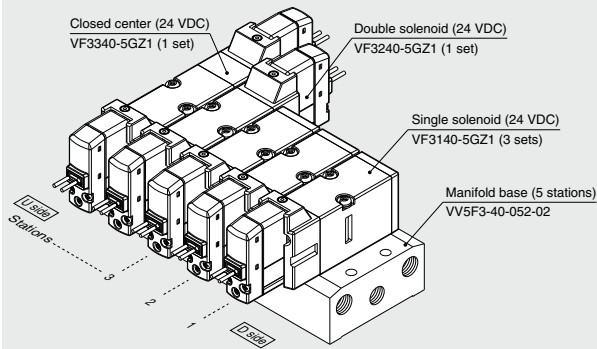

- VV5F3-40-052-02 1 set (Type 40, 5-station manifold base part no.)


 - * VF3140-5GZ1 3 sets (Single solenoid part no.)
 - * VF3240-5GZ1 1 set (Double solenoid part no.)
 - * VF3340-5GZ1 1 set (Closed center part no.)

→ The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.
- The valve arrangement is numbered as the 1st station from D side.
 - Under the manifold base number, state the valves to be mounted in order from the 1st station as shown in the figure above. If the arrangement becomes complicated, specify on the manifold specification sheet.

Series VF3000/5000


Manifold Options

■ For base mounted Blanking plate assembly

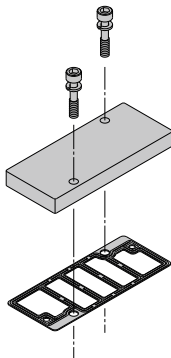


Series	Blanking plate assembly part no.
VF3000	DXT031-38-5A
VF5000	VF5000-70-2A

■ Mounting screw, gasket part no.

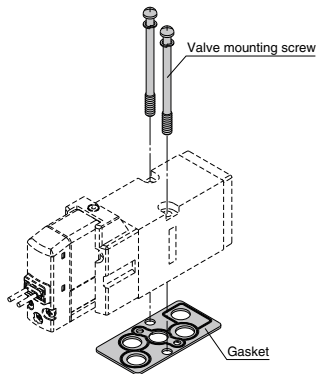

Series	Valve mounting screw (1 pc.)	Gasket
VF3000	Round head combination screw DXT031-44-1 (M4 x 39.5, With spring washer)	DXT031-30-11
VF5000	Hexagon socket head cap screw AXT620-32-1 (M4 x 48, With spring washer)	DXT156-9-8

■ Individual EXH spacer assembly

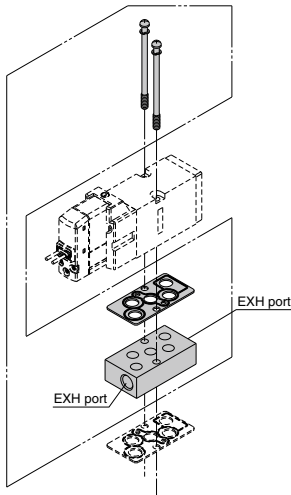

⚠ Caution

Tightening Torque for Mounting Screw

M4: 1.4 N·m

⚠ Warning

When mounting a valve or spacer on the manifold base or sub-plate, etc., the mounting orientation is already decided. If mounted in a wrong direction, the equipment to be connected may result in a malfunction. Refer to the dimensions for mounting.

VF **3** 000-75-2 **A**



•Series

Symbol	Series	Port size
3	VF3000	1/8
5	VF5000	1/4

•Thread type



NII	Rc
F	G
N	NPT
T	NPTF

Grommet (G) (H)
DC without light/
surge voltage suppressor



G: Approx. 300
H: Approx. 600
I: Lead wire length

G: Approx. 300
H: Approx. 600
(Lead wire length)




n: Stations

	2	3	4	5	6	7	8	9	10	11	12	13	14
L ₁	83.5	111	138.5	166	193.5	221	248.5	276	303.5	331	358.5	386	413.5
L ₂	71.5	99	126.5	154	181.5	209	236.5	264	291.5	319	346.5	374	401.5


$\backslash n$	15	16	17	18	19	20
L ₁	441	468.5	496	523.5	551	578.5
L ₂	429	456.5	484	511.5	539	566.5

L-type plug connector (L)




Unless otherwise indicated, dimensions are the same as Grommet (G).

M-type plug connector (M)




Unless otherwise indicated, dimensions are the same as Grommet (G).

DIN terminal (D) (Y)



Unless otherwise indicated, dimensions are the same as Grommet (G).

Conduit terminal (T)



[]: Without indicator light
Unless otherwise indicated, dimensions are the same as Grommet (G).




SJ
SY
SY
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7

Series VF3000/5000

Dimensions: Series VF3000

Type 40/VV5F3-40-□□-2-02□: When the individual EXH spacer (VF3000-75-2A) is mounted.

Grommet (G) (H)

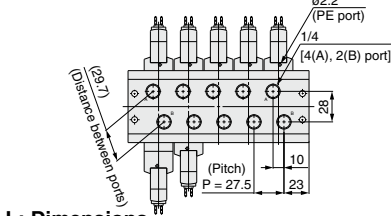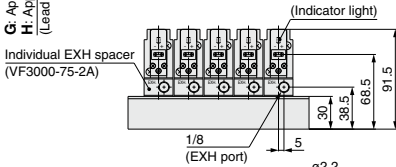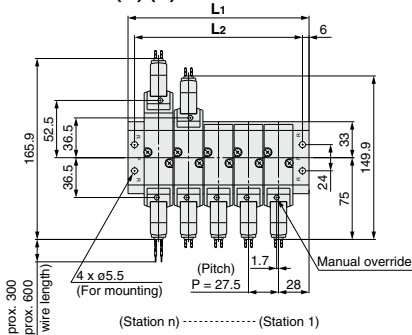


L: Dimensions

n	2	3	4	5	6	7	8	9	10	11	12	13	14
L1	83.5	111	138.5	166	193.5	221	248.5	276	303.5	331	358.5	386	413.5
L2	71.5	99	126.5	154	181.5	209	236.5	264	291.5	319	346.5	374	401.5


n	15	16	17	18	19	20
L1	441	468.5	496	523.5	551	578.5
L2	429	456.5	484	511.5	539	566.5

M-type plug connector (M)



Unless otherwise indicated, dimensions are the same as Grommet (G).


DIN terminal (D) (Y)




Unless otherwise indicated, dimensions are the same as Grommet (G).

Grommet (G) (H)

DC without light/
surge voltage suppressor




L-type plug connector (L)



Unless otherwise indicated, dimensions are the same as Grommet (G).


Conduit terminal (T)





[]: Without indicator light
Unless otherwise indicated, dimensions are the same as Grommet (G).

Dimensions: Series VF5000

Type 40/VV5F5-40-□□2-02□: Common exhaust Grommet (G)

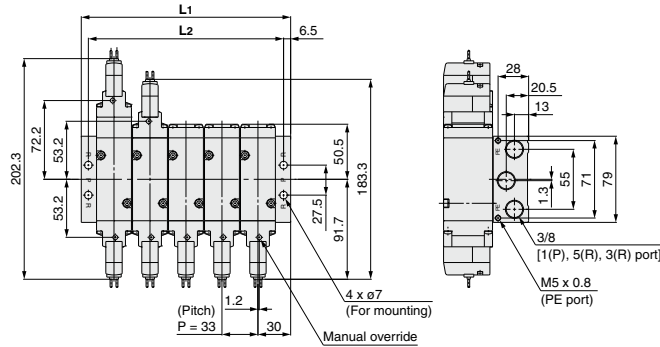


(Station n) (Station 1)




L: Dimensions

	n	2	3	4	5	6	7	8	9	10
L1	93	126	159	192	225	258	291	324	357	
L2	80	113	146	179	212	245	278	311	344	

Grommet (G) (H) DC without light/ surge voltage suppressor

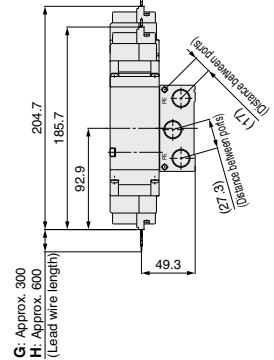


L-type plug connector (L)




Unless otherwise indicated, dimensions are the same as Grommet (G).

M-type plug connector (M)




Unless otherwise indicated, dimensions are the same as Grommet (G).

DIN terminal (D) (Y)



Unless otherwise indicated, dimensions are the same as Grommet (G).

Conduit terminal (T)





[] : Without indicator light
Unless otherwise indicated, dimensions are the same as Grommet (G).

Series VF3000/5000


Dimensions: Series VF5000

Type 40/VV5F5-40-□□-2-02□: When the individual EXH spacer (VF5000-75-2A) is mounted.

Grommet (G)

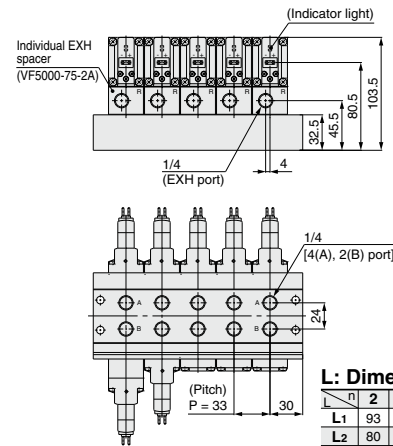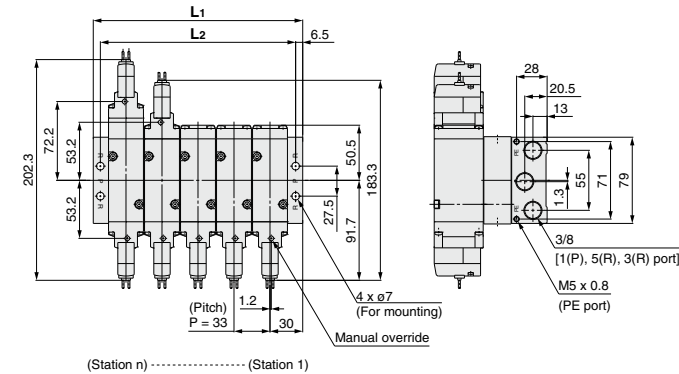


M-type plug connector (M)




Unless otherwise indicated, dimensions are the same as Grommet (G).

Grommet (G) (H)

DC without light/
surge voltage suppressor

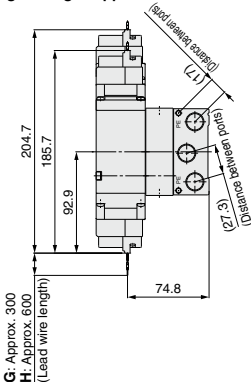


L-type plug connector (L)




Unless otherwise indicated, dimensions are the same as Grommet (G).

DIN terminal (D) (Y)



Unless otherwise indicated, dimensions are the same as Grommet (G).

Conduit terminal (T)



[]: Without indicator light
Unless otherwise indicated, dimensions are the same as Grommet (G).



Series VF Specific Product Precautions 1

Be sure to read before handling.


Refer to front matter 53 for Safety Instructions, pages 3 to 8 for 3/4/5 Port Solenoid Valves Precautions.

Manual Override

⚠ Warning


Regardless of an electric signal for the solenoid valve, the manual override is used for switching the main valve. Connected actuator is started by manual operation. Use the manual override after confirming that there is no danger.

■ Non-locking push type




Push down on the manual override with a small screwdriver until it stops. Release the screwdriver and the manual override will return.

■ Push-turn locking slotted type




Locked position




Push down on the manual override with a small flat head screwdriver until it stops. Turn it clockwise by 90° to lock it. Turn it counterclockwise to release it.

■ Push-turn locking lever type



Locked position



After pushing down, turn in the direction of the arrow. If it is not turned, it can be operated the same way as the non-locking push type.

⚠ Caution


When locking the manual override on the push-turn locking type (D or E type), be sure to push it down before turning. Turning without first pushing it down can cause damage to the manual override and other trouble such as air leakage, etc. Do not apply excessive torque when turning the locking type manual override. (0.1 N·m)

How to Use L/M-Type Plug Connector

⚠ Caution


1. Connector attachment/detachment

- To attach a connector, hold the lever and connector unit between your fingers and insert straight onto the pins of the solenoid valve so that the lever's pawl is pushed into the groove and locks.
- To detach a connector, remove the pawl from the groove by pushing the lever downward with your thumb, and pull the connector straight out.

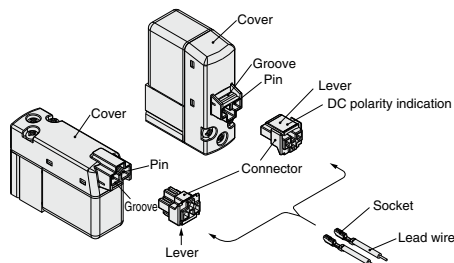

2. Crimping lead wire and socket connection

Not necessary if ordering the lead wire pre-connected model. Strip 3.2 to 3.7 mm at the end of the lead wires, insert the ends of the core wires evenly into the sockets, and then crimp with a crimping tool. When this is done, take care that the coverings of the lead wires do not enter the core wire crimping area. (Please contact SMC for details on the crimping tool.)

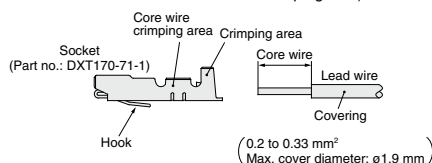


3. Socket with lead wire attachment/detachment

• Attachment

Insert the sockets into the square holes of the connector (with +, - indication), and continue to push the sockets all the way in until they lock by hooking into the seats in the connector. (When they are pushed in, their hooks open and they are locked automatically.) Then, confirm that they are locked by pulling lightly on the lead wires.

• Detachment

To detach a socket from a connector, pull out the lead wire while pressing the socket's hook with a stick having a thin tip (approx. 1 mm). If the socket will be used again, first spread the hook outward.

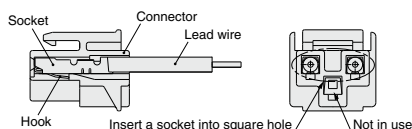

SJ

SY

SY

SV

SYJ

SZ

VF

VP4

S0700

VQ

VQ4

VQ5

VQC

VQC4

VQZ

SQ

VFS

VFR

VQ7



Series VF Specific Product Precautions 2

Be sure to read before handling.

Refer to front matter 53 for Safety Instructions, pages 3 to 8 for 3/4/5 Port Solenoid Valves Precautions.

Plug Connector Lead Wire Length

⚠ Caution

Plug connector lead wires have a standard length of 300 mm, however, the following lengths are also available.

How to Order Connector Assembly

DC	: V200-30-4A-	
100 VAC	: V200-30-1A-	
200 VAC	: V200-30-2A-	
Other AC voltages	: V200-30-3A-	

Without lead wire : V200-30-A
(With a connector and 2 sockets)

● Lead wire length

Nil	300 mm
6	600 mm
10	1000 mm
15	1500 mm
20	2000 mm
25	2500 mm
30	3000 mm
50	5000 mm

How to Order

Specify the connector assembly part number together with the part number for the plug connector type solenoid valve without connector.

(Example) Lead wire length: 2000 mm

DC	AC
VF3130-5LO1-02	VF3130-1LO1-02
V200-30-4A-20	V200-30-1A-20

How to Use DIN Terminal Connector

The DIN terminal with an IP65 (enclosure) is protected against dust and water, however, it must not be used in water.

⚠ Caution

Connection


- 1) Loosen the set screw and pull the connector out of the solenoid valve terminal block.
- 2) After removing the set screw, insert a flat head screwdriver, etc. into the notch on the bottom of the terminal block and pry it open, separating the terminal block and the housing.
- 3) Loosen the terminal screws on the terminal block, insert the core of the lead wire into the terminal, and attach securely with the terminal screws.

In addition, when using the DC mode type with a surge voltage suppressor (polar: S and Z types), connect wires corresponding to the polarity (+ or -) that is printed on the terminal block.

- 4) Secure the cord by fastening the ground nut.

In the case of connecting wires, select cabtire cords carefully because if those out of the specified range ($\phi 4.5$ to $\phi 7$) are used, it will not be able to satisfy IP65 (enclosure).

Tighten the ground nut and set screw within the specified range of torque.

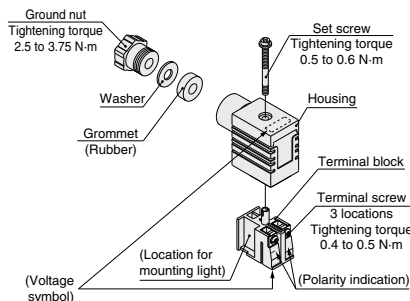

* Refer to page 857 for the DIN connector part no.

Changing the entry direction

After separating the terminal block and housing, the cord entry direction can be changed by attaching the housing in the opposite direction.

* Make sure not to damage elements, etc., with the lead wires of the cord.

Precautions

Plug in and pull out the connector vertically without tilting to one side.

Applicable cable

Cable O.D.: $\phi 4.5$ to $\phi 7$

(Reference) 0.5 mm^2 to 1.5 mm^2 , 2-core or 3-core, equivalent to JIS C 3306

Applicable crimped terminal

O terminal: R1.25-4M that is specified in JIS C 2805

Y terminal: 1.25-3L, which is released by JST Mfg. Co., Ltd.

Stick terminal: Size 1.5 or shorter




Series VF Specific Product Precautions 3

Be sure to read before handling.

Refer to front matter 53 for Safety Instructions, pages 3 to 8 for 3/4/5 Port Solenoid Valves Precautions.

DIN (EN175301-803) Terminal

Y type DIN terminal corresponds to the DIN connector with terminal pitch 10 mm, which complies with EN175301-803B. Since the terminal pitch is different from the D type DIN connector, these two types are not interchangeable.



How to Order DIN Connector

⚠ Caution

● Without indicator light

DC, AC, Common to all voltages: V200- -1

● With indicator light

DC

Polar type (□Z) : V200- -3- -

Non-polar type (□U) : V200- -5- -

● Rated voltage

05	24 VDC
06	12 VDC

AC (□Z) : V200- -7- -

Connector specifications

	D type	Y type
61	100/110 VAC [115 VAC]	
63	200/220 VAC [230 VAC]	
07	240 VAC	


● Rated voltage

01	100/110 VAC [115 VAC]
02	200/220 VAC [230 VAC]
07	240 VAC

Note) For 24 VAC, the part no. is V200-61-5-B.


Circuit diagram with light (Built-in connector)

DC (□Z) circuit diagram




LED: Light emitting diode
D: Protective diode
R: Resistor

AC (□Z) circuit diagram



DC (□U) circuit diagram



LED: Light emitting diode
R: Resistor

Note) The 24 VAC specification is the same as those in the DC (□U) circuit diagram.

NL: Neon light, R: Resistor

How to Use Conduit Terminal

⚠ Caution


Connection

- Loosen the set screw and remove the terminal block cover from the terminal block.
- Loosen the terminal screws on the terminal block, insert the core of the lead wire or crimped terminal into the terminal, and attach securely with the terminal screws.
In addition, when using the DC mode type with a surge voltage suppressor (polar: S and Z types), connect wires to terminal 1 and 2 corresponding to the polarity (+ or -) as shown on the right figure.
- Secure the cord by fastening the ground nut.



In the case of connecting wires, select cable cords carefully because if those out of the specified range ($\phi 4.5$ to $\phi 7$) are used, it will not be able to satisfy IP65 (enclosure).

Tighten the ground nut and set screw within the specified range of torque.

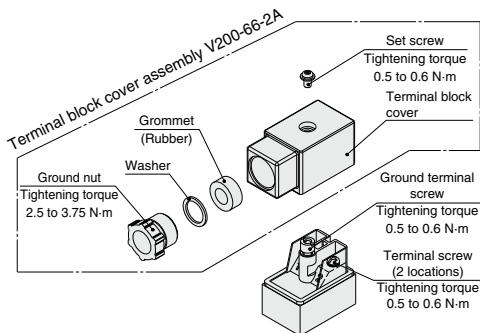

Applicable cable

Cable O.D.: $\phi 4.5$ to $\phi 7$

(Reference) 0.5 mm^2 to 1.5 mm^2 , 2-core or 3-core, equivalent to JIS C 3306

Applicable crimped terminal

O terminal: Equivalent to R1.25-3 that is specified in JIS C 2805

Y terminal: Equivalent to 1.25-3, which is released by JST Mfg.

Co., Ltd.

* Use O terminal when a ground terminal is used.

SJ

SY

SY

SV

SYJ

SZ

VF

VP4

S0700

VQ

VQ4

VQ5

VQC

VQC4

VQZ

SQ

VFS

VFR

VQ7



Series VF Specific Product Precautions 4

Be sure to read before handling.

Refer to front matter 53 for Safety Instructions, pages 3 to 8 for 3/4/5 Port Solenoid Valves Precautions.


Light/Surge Voltage Suppressor

⚠ Caution

<DC>


■ Polar type

With surge voltage suppressor (□S)




● Grommet or L/M-type plug connector

With light/surge voltage suppressor (□Z)




● DIN or Conduit terminal

With light/surge voltage suppressor (□Z)




■ Non-polar type

With surge voltage suppressor (□R)




● Grommet or L/M-type plug connector

With light/surge voltage suppressor (□U)



● DIN or Conduit terminal

With light/surge voltage suppressor (□U)




- Please connect correctly the lead wires to + (positive) and - (negative) indications on the connector. (For non-polar type, the lead wires can be connected to either one.)
- When the valve with polarity protection diode is used, the voltage will drop by approx. 1 V. Therefore, pay attention to the allowable voltage fluctuation (For details, refer to the solenoid specifications of each type of valve).
- Solenoids, whose lead wires have been pre-wired: + (positive) side red and - (negative) side black.

■ With power saving circuit


Power consumption is decreased by approx. 1/3 by reducing the wattage required to hold the valve in an energized state. (Effective energizing time is over 40 ms at 24 VDC.)

Refer to the electrical power waveform as shown below.

<Electrical power waveform of energy saving type>

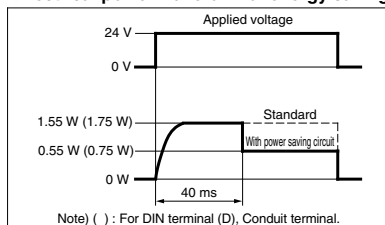

- Since the voltage will drop by approx. 0.5 V due to the transistor, pay attention to the allowable voltage fluctuation. (For details, refer to the solenoid specifications of each type of valve.)




<AC>

S type is not available, since a rectifier prevents surge voltage generation.


● Grommet or L/M-type plug connector

With light/surge voltage suppressor (□Z)



● DIN or Conduit terminal

With light/surge voltage suppressor (□Z)



Note) LED for 24 VAC.

Residual voltage of the surge voltage suppressor

Note) If a varistor or diode surge voltage suppressor is used, there is some residual voltage to the protection element and rated voltage. Therefore, refer to the table below and pay attention to the surge voltage protection on the controller side. Also, since the response time does change, refer to the specifications on pages 809 and 823.

Residual Voltage

Surge voltage suppressor	DC		AC
	24 V	12 V	
S, Z	Approx. 1 V		Approx. 1 V
R, U	Approx. 47 V	Approx. 32 V	—

Continuous Duty

For applications such as mounting a valve on a control panel, incorporate measure to limit the heat radiation so that it is within the operating temperature range. Furthermore, do not touch it while it is being energized or right after it is energized.



Series VF

Specific Product Precautions 5

Be sure to read before handling.

Refer to front matter 53 for Safety Instructions, pages 3 to 8 for 3/4/5 Port Solenoid Valves Precautions.

One-touch Fittings Precautions

⚠ Caution

When fittings are used, they may interfere with one another depending on their types and sizes. Therefore, the dimensions of the fittings to be used should first be confirmed in their respective catalogs.

Fittings whose compliance with the VF series is already confirmed are stated below. If the fitting within the applicable range is selected, there will not be any interference.

Applicable Fittings: Series KQ2H, KQ2S

Series	Model	Piping port	Port size	Applicable tubing O.D.						
				ø3.2	ø4	ø6	ø8	ø10	ø12	ø16
VF1000	VF1□20-□□1-M5	4(A), 2(B)	M5	<div></div>						
		5(EA), 3(EB)	M5	<div></div>						
	VF1□20-□□1-01	4(A), 2(B)	1/8	<div></div>						
		5(EA), 3(EB)	M5	<div></div>						
	VF1□3□-□□1-M5	4(A), 2(B)	M5	<div></div>						
		VF1□3□-□□1-01	4(A), 2(B)	1/8	<div></div>					
	Type 30 manifold base	1(P), 5/3(R)	1/8	<div></div>						
	Type 31 manifold base	1(P)	1/8	<div></div>						
5(EA), 3(EB)		M5	<div></div>							

Series	Model	Piping port	Port size	Applicable tubing O.D.						
				ø3.2	ø4	ø6	ø8	ø10	ø12	ø16
VF3000	VF3□3□-□□1-01	4(A), 2(B)	1/8	<div></div>						
		1(P), 5(EA), 3(EB)	1/8	<div></div>						
	VF3□3□-□□1-02	4(A), 2(B)	1/4	<div></div>						
		1(P), 5(EA), 3(EB)	P: 1/4, EA, EB: 1/8	<div></div>						
	VF3□4□-□□1-02	4(A), 2(B)	1/4	<div></div>						
		1(P), 5(EA), 3(EB)	1/4	<div></div>						
	VF3□4□-□□1-03	4(A), 2(B)	3/8	<div></div>						
		1(P), 5(EA), 3(EB)	3/8	<div></div>						
	Type 30 manifold base	1(P), 5(R), 3(R)	1/4	<div></div>						
	Type 40 manifold base	4(A), 2(B)	1/4	<div></div>						
	1(P), 5(R), 3(R)	1/4	<div></div>							

Series	Model	Piping port	Port size	Applicable tubing O.D.						
				ø3.2	ø4	ø6	ø8	ø10	ø12	ø16
VF5000	VF5□2□-□□1-02	4(A), 2(B)	1/4							
		1(P), 5(EA), 3(EB)	1/4							
	VF5□2□-□□1-03	4(A), 2(B)	3/8							
		1(P), 5(EA), 3(EB)	3/8							
	VF5□44-□□1-02	4(A), 2(B)	1/4							
		1(P), 5(EA), 3(EB)	1/4							
	VF5□44-□□1-03	4(A), 2(B)	3/8							
		1(P), 5(EA), 3(EB)	3/8							
	VF5□44-□□1-04	4(A), 2(B)	1/2							
		1(P), 5(EA), 3(EB)	1/2							
	Type 20 manifold base	1(P), 5(R), 3(R)	3/8							
	Type 21 manifold base	1(P), 5(R), 3(R)	1/2							
	Type 40 manifold base	4(A), 2(B)	1/4							
		1(P), 5(R), 3(R)	3/8							

SJ
SY
SY
SV
SYJ
SZ
VF
VP4
S0700
VQ
VQ4
VQ5
VQC
VQC4
VQZ
SQ
VFS
VFR
VQ7



Low Wattage Specification (VF1000/3000) Specific Product Precautions 6

Be sure to read before handling.


Refer to front matter 53 for Safety Instructions, pages 3 to 8 for 3/4/5 Port Solenoid Valves Precautions.

Manual Override

⚠ Warning


1. Non-locking push type [Standard]

Press in the direction of the arrow.



2. Push-turn locking slotted type [D type]

After pushing down, turn in the direction of the arrow. If it is not turned, it can be operated the same way as the non-locking push type.



Locked position




⚠ Caution

When operating the D type, use a watchmakers' screwdriver and turn lightly.

[Torque: Less than 0.1 N·m]

3. Push-turn locking lever type [E type]

After pushing down, turn in the direction of the arrow. If it is not turned, it can be operated the same way as the non-locking push type.



Locked position



⚠ Caution

When locking the manual override with the push-turn locking type (D or E type), be sure to push it down before turning.

Turning without first pushing it down can cause damage to the manual override and other trouble such as air leakage, etc.

Solenoid Valve for 200/220 VAC Specification

⚠ Warning


AC specification solenoid valves with grommet or L/M-type plug connector have a built-in rectifier circuit in the pilot section to operate the DC coil. With 200/220VAC specification pilot valves, this built-in rectifier generates heat when energized. The surface may become hot depending on the energized condition; therefore, do not touch the solenoid valves.

How to Use L/M-Type Plug Connector

⚠ Caution

1. Connector attachment/detachment


- To attach a connector, hold the lever and connector unit between your fingers and insert straight onto the pins of the solenoid valve so that the lever's pawl is pushed into the groove and locks.
- To detach a connector, remove the pawl from the groove by pushing the lever downward with your thumb, and pull the connector straight out.

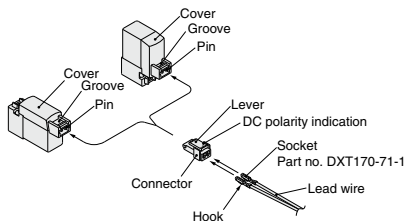

2. Crimping lead wire and socket connection

Strip 3.2 to 3.7 mm at the end of the lead wires, insert the ends of the core wires evenly into the sockets, and then crimp with a crimping tool. When this is done, take care that the coverings of the lead wires do not enter the core wire crimping area.

(Please contact SMC for the dedicated crimping tools.)




3. Socket with lead wire attachment/detachment

• Attachment

Insert the sockets into the square holes of the connector (with +, - indication), and continue to push the sockets all the way in until they lock by hooking into the seats in the connector. (When they are pushed in, their hooks open and they are locked automatically.) Then, confirm that they are locked by pulling lightly on the lead wires.

• Detachment

To detach a socket from a connector, pull out the lead wire while pressing the socket's hook with a stick having a thin tip (approx. 1 mm). If the socket will be used again, first spread the hook outward.





Low Wattage Specification (VF1000/3000) Specific Product Precautions 6-1

Be sure to read before handling.


Refer to front matter 53 for Safety Instructions, pages 3 to 8 for 3/4/5 Port Solenoid Valves Precautions.


Plug Connector Lead Wire Length


Caution

Plug connector lead wires have a standard length of 300 mm, however, the following lengths are also available.

How to Order Connector Assembly

DC: **SY100-30-4A-**

100 VAC: **SY100-30-1A-**

200 VAC: **SY100-30-2A-**

Other AC voltages: **SY100-30-3A-**

Without lead wire: **SY100-30-A**

(With a connector and 2 sockets)

How to Order

Specify the connector assembly part number together with the part number for the plug connector type solenoid valve without connector.

(Example) Lead wire length: 2000 mm

DC

VF3130Y-5LO1-02

SY100-30-4A-20

AC

VF3130Y-1LO1-02

SY100-30-1A-20

• Lead wire length

Nil	300 mm
6	600 mm
10	1000 mm
15	1500 mm
20	2000 mm
25	2500 mm
30	3000 mm
50	5000 mm

SJ

SY

SY

SV

SYJ

SZ

VF

VP4

S0700

VQ

VQ4

VQ5

VQC

VQC4

VQZ

SQ

VFS

VFR

VQ7



Low Wattage Specification (VF1000/3000) Specific Product Precautions 7

Be sure to read before handling.


Refer to front matter 53 for Safety Instructions, pages 3 to 8 for 3/4/5 Port Solenoid Valves Precautions.

Light/Surge Voltage Suppressor


⚠ Caution

1. L/M-type plug connector

<DC>




<AC>




2. DIN terminal

<DC>

With surge voltage suppressor (DS, DOS, YS, YOS)




With light/surge voltage suppressor (DZ, YZ)



<AC>

With indicator light (DZ, YZ)



Note) If a varistor surge voltage suppressor is used, there is some residual voltage to the protection element and rated voltage. Therefore, pay attention to the surge voltage protection on the controller side.

How to Use DIN Terminal

1. ISO#: Conforming to EN-175301-803C (former DIN 43650C) (Distance between pins: 8 mm)

The DIN terminal type with an IP65 (enclosure) is protected against dust and water, however, it must not be used in water.

2. Connection

- 1) Loosen the set screw and pull the connector out of the solenoid valve terminal block.
- 2) After removing the set screw, insert a flat head screwdriver, etc. into the notch on the bottom of the terminal block and pry it open, separating the terminal block and the housing.
- 3) Loosen the terminal screws (slotted head screw) on the terminal block, insert the core of the lead wire into the terminal according to wiring connection, and attach securely with the terminal screws.
- 4) Tighten the ground nut to secure the wire.

3. Changing the entry direction

After separating the terminal block and housing, the cord entry direction can be changed by attaching the housing in a different direction (four directions at 90° intervals).

* Make sure not to damage a light, etc., with the lead wires of the cord.

How to Use DIN Terminal


4. Precautions

Plug in and pull out the connector vertically without tilting to one side.

5. Applicable cable

Cable O.D: $\phi 3.5$ to $\phi 7$

(Reference) 0.5 mm², 2-core or 3-core, equivalent to JIS C 3306

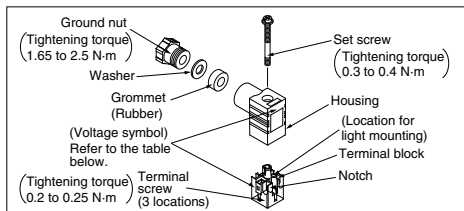

DIN Connector Part No.

⚠ Caution

DIN terminal (D)

Without indicator light	SY100-61-1
-------------------------	------------

With indicator light

Rated voltage	Voltage symbol	Part no.
24 VDC	24 V	SY100-61-3-05
12 VDC	12 V	SY100-61-3-06
100 VAC	100 V	SY100-61-2-01
200 VAC	200 V	SY100-61-2-02
110 VAC	110 V	SY100-61-2-03
220 VAC	220 V	SY100-61-2-04

DIN terminal (Y)

Without indicator light

Rated voltage	Voltage symbol	Part no.
Common to all voltages	None	SY100-82-1

With indicator light

Rated voltage	Voltage symbol	Part no.
24 VDC	24 V	SY100-82-3-05
12 VDC	12 V	SY100-82-3-06
100 VAC	100 V	SY100-82-2-01
200 VAC	200 V	SY100-82-2-02
110 VAC (115VAC)	110 V	SY100-82-2-03
220 VAC (230 VAC)	220 V	SY100-82-2-04

Circuit diagram with light

