


# Responses to reduction of spare parts, short lead times, and a drastic reduction of special orders


## Pin Plate Cylinder (Reference support block machinable type)

**1** Guide pin is separated from the reference support block.

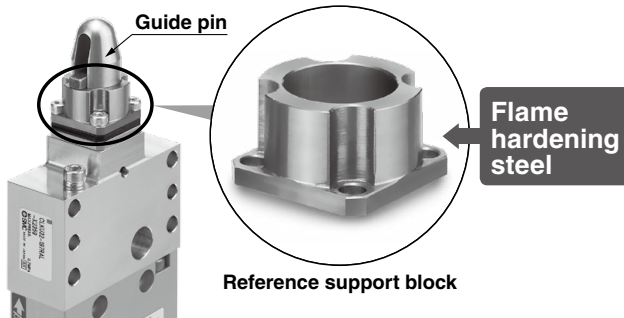


Reference support block can be machined by the customer. (The block can be changed to a desired shape.)

Note) After machining (or even without machining), use the reference support block after it has been flame hardened. However, do not perform quenching.  
For machining and treatment, consult with SMC.

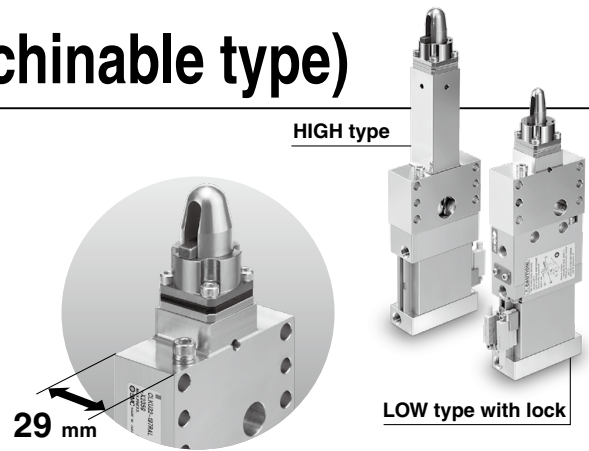


- $\varnothing 32$  plate cylinder type
- Slim body: **29 mm** in width
- Model with lock mechanism, which prevents workpiece drops during emergency stops, can be selected.

**2** The height from the reference hole to the surface of the reference support block can be selected from 2 types "HIGH" or "LOW".

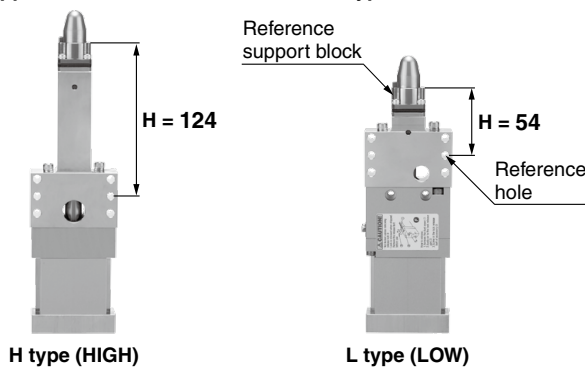

Magnetic field resistant auto switches are mountable. (D-P3DWA□)

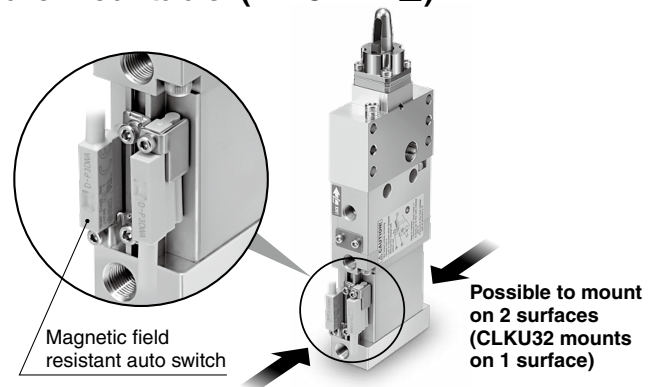

**3** Equipped with shims (3 mm) as standard. (Height can be changed.)


**Shims (3 mm)**  
Shim thickness  
1 mm: 2 pcs.  
0.5 mm: 2 pcs.



### Application Examples


**CKU32** (Pin plate cylinder)

- Compatible with installing in narrow spaces
- For clamping small and lightweight workpiece and material handling, etc.



**CLKU32** (Pin plate cylinder/With lock)

- Unclamp direction locking
- Drop prevention for workpiece during emergency stops



➔ Achieves reduction of spare parts, short lead times, and a drastic reduction of special orders according to features **1**, **2**, and **3**.

# C(L)KU32-X2359A



# Pin Plate Cylinder

# C(L)KU32-X2359A

## How to Order

**C** **KU32-127RAL-P3DWASC** **-X2359A**

**One-way lock**

Nil	Without lock
L	With lock

**Bore size**

32	Equiv. $\phi 32$
----	------------------

**Guide pin diameter**

\* For guide pin diameter, refer to page 2.

**Guide pin shape**

R	Round type	D	Diamond type
---	------------	---	--------------

**Clamp arm position (viewed from top)**

A*	Same as the port side
B	90° from the port side
C*	180° from the port side
D	270° from the port side

**Auto switch**

Nil	Without auto switch
-----	---------------------

\* Refer to the table below for applicable auto switches.  
\* When the total thickness of clamped workpiece is over 2 mm, the auto switch may not be adjusted to the most sensitive position.

**Clamping height (Refer to figures below)**

L	LOW type (54 mm)
H	HIGH type (124 mm)

**Reference support block machinable type**

**Number of auto switches**

Nil	2 pcs.
S	1 pc. (Unclamping side)

**Clamp arm**

\* For LOW type, clamp arm positions are usable only with A and C.

**LOW type**

**HIGH type**

**Applicable Auto Switches**/Refer to the **Web Catalog** for further information on auto switches.

Type	Auto switch model	Applicable magnetic field	Electrical entry	Indicator light	Wiring (Pin no. in use)	Load voltage	Lead wire length	Applicable load
Solid state auto switch	P3DWASC	AC magnetic field (Single-phase AC welding magnetic field)	Pre-wired connector	2-color indicator	2-wire (3-4)	24 VDC	0.3 m 0.5 m 3 m 5 m	Relay, PLC
	P3DWASE				2-wire (1-4)			
	P3DWA		Grommet		2-wire			
	P3DWAL							
	P3DWAZ							

**General Purpose Auto Switches** ⚠ General purpose auto switches cannot be used under a strong magnetic field./Refer to the **Web Catalog** for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length [m]				Pre-wired connector	Applicable load	
					DC	AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)	5 (Z)			
Solid state auto switch	Diagnostic indication (2-color indicator)	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9NV	●	●	●	○	○	IC circuit	
				3-wire (PNP)				M9PV	●	●	●	○			
				2-wire				M9BV	●	●	●	○	○		
				3-wire (NPN)				M9NWV	●	●	●	○	○		IC circuit
				3-wire (PNP)				M9PWV	●	●	●	○	○		
				2-wire				M9BWV	●	●	●	○	○		
Reed auto switch	Diagnostic indication (2-color indicator)	Grommet	Yes	2-wire	24 V	12 V	100 V	A73	●	—	●	—	—	Relay, PLC	
								A79W	●	—	●	—	—		

\* Solid state auto switches marked with "○" are produced upon receipt of order.

\* The D-A9□ and A9□V cannot be mounted.

\* For details about auto switches with pre-wired connector, refer to the **Web Catalog**.

\* Auto switches and mounting brackets are shipped together, (but not assembled).

\* Lead wire length symbols: 0.5 m.....Nil (Example) M9NWV  
1 m.....M (Example) M9NWVM  
3 m.....L (Example) M9NWVL  
5 m.....L (Example) M9NWVZ

# Pin Plate Cylinder **C(L)KU32-X2359A**



## Basic Specifications

Model	<b>C(L)KU32</b>	
<b>Action</b>	Double acting	
<b>Bore size (mm)</b>	32 equivalent	
<b>Cylinder stroke/Clamp stroke (mm)</b>	12.5 (Without workpiece)/10	
<b>Fluid</b>	Air	
<b>Minimum operating pressure</b>	CKU□: 0.1 MPa	CLKU□: 0.15 MPa*
<b>Maximum operating pressure</b>	0.7 MPa	
<b>Ambient and fluid temperatures</b>	-10 to 60°C (No freezing)	
<b>Cushion</b>	None	
<b>Lubrication</b>	Non-lube	
<b>Piston speed (Clamp speed)</b>	50 to 150 mm/sec	
<b>Port size (Cylinder port)</b>	Rc1/8	

\* Minimum operating pressure is 0.2 MPa when cylinder part and locking part use the same piping.

## Lock Specifications

Model	<b>CLKU32</b>
<b>Locking action</b>	Spring locking (Exhaust locking)
<b>Unlocking pressure</b>	0.2 MPa
<b>Lock starting pressure</b>	0.05 MPa
<b>Locking direction</b>	Unclamp direction locking
<b>Port size (Lock release port)</b>	Rc1/8
<b>Holding force (Maximum static load)</b>	402 N

## Clamping Force

Model	Operating pressure (MPa)					
	0.2	0.3	0.4	0.5	0.6	0.7
<b>C(L)KU32</b>	130	195	260	325	390	455

Note 1) It takes approximately 0.3 seconds for the cylinder to operate to generate clamping force from an unclamping state (when no speed controller is installed). Design circuit taking into consideration the time before the clamping force is generated.

Note 2) Determine the clamping force according to the strength of the workpiece. It can be damaged if the clamping force is too large.

Note 3) Guide pins and clamp arms are consumable items. Please prepare spare parts in case they are damaged.

## Guide Pin Diameter

Symbol	125	127	128	129	130	175	177	178	179	180	195	197	198	199
Guide pin diameter (mm)	12.5	12.7	12.8	12.9	13.0	17.5	17.7	17.8	17.9	18.0	19.5	19.7	19.8	19.9
Applicable hole diameter of workpiece (mm)	For ø13				For ø18				For ø20					
Guide pin shape	Round type, Diamond type													

## Weight

Guide pin diameter (mm)	Model	<b>CKU32-X2359A</b>		<b>CLKU32-X2359A</b>	
	Shape	LOW type	HIGH type	LOW type	HIGH type
12.5 to 13.0	Round type	790	960	1000	1170
	Diamond type				
17.5 to 18.0	Round type	840	1010	1050	1220
	Diamond type				
19.5 to 19.9	Round type	840	1010	1050	1220
	Diamond type				

# C(L)KU32-X2359A

## Replacement Parts (C(L)KU, LOW type/HIGH type common)

### ■ Guide Pin Order No.

**CKU32 - R 125 S - X2359A**

#### Guide pin shape

<b>R</b>	Round type
<b>D</b>	Diamond type

#### Guide pin diameter

Symbol	125	127	128	129	130	175	177	178	179	180	195	197	198	199
Guide pin diameter (mm)	12.5	12.7	12.8	12.9	13.0	17.5	17.7	17.8	17.9	18.0	19.5	19.7	19.8	19.9
Applicable hole diameter of workpiece (mm)	For $\phi 13$					For $\phi 18$					For $\phi 20$			
Guide pin shape	Round type, Diamond type													

### ■ Clamp Arm Order No.

Guide pin		Part no.
Diameter (mm)	Shape	
12.5 to 13.0	Round type/	CKU32-54-530ZL
17.5 to 19.9	Diamond type	CKU32-54-532ZL


### ■ Reference Support Block Order No.

Order No.		Part no.
Guide pin (mm)	Diameter	
12.5 to 13.0	Round type/ Diamond type	CKU32-36-530ZL
17.5 to 18.0		CKU32-36-532ZL
19.5 to 19.9		CKU32-36-534ZL

### ■ Order No.

Description	Plate thickness (mm)	Part no.
Shim A	1	<b>CKQ32-36A746MN</b>
Shim B	0.5	<b>CKQ32-36B746MN</b>

- Shims can be mounted up to 3 mm.

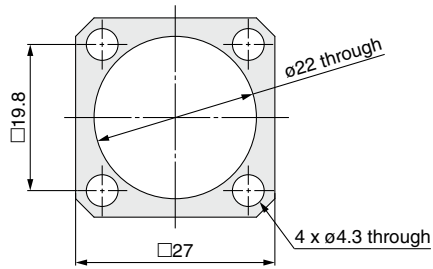


Shim dimensions



# C(L)KU32-X2359A

## Dimensions

### CKU32 (Clamping height LOW type)

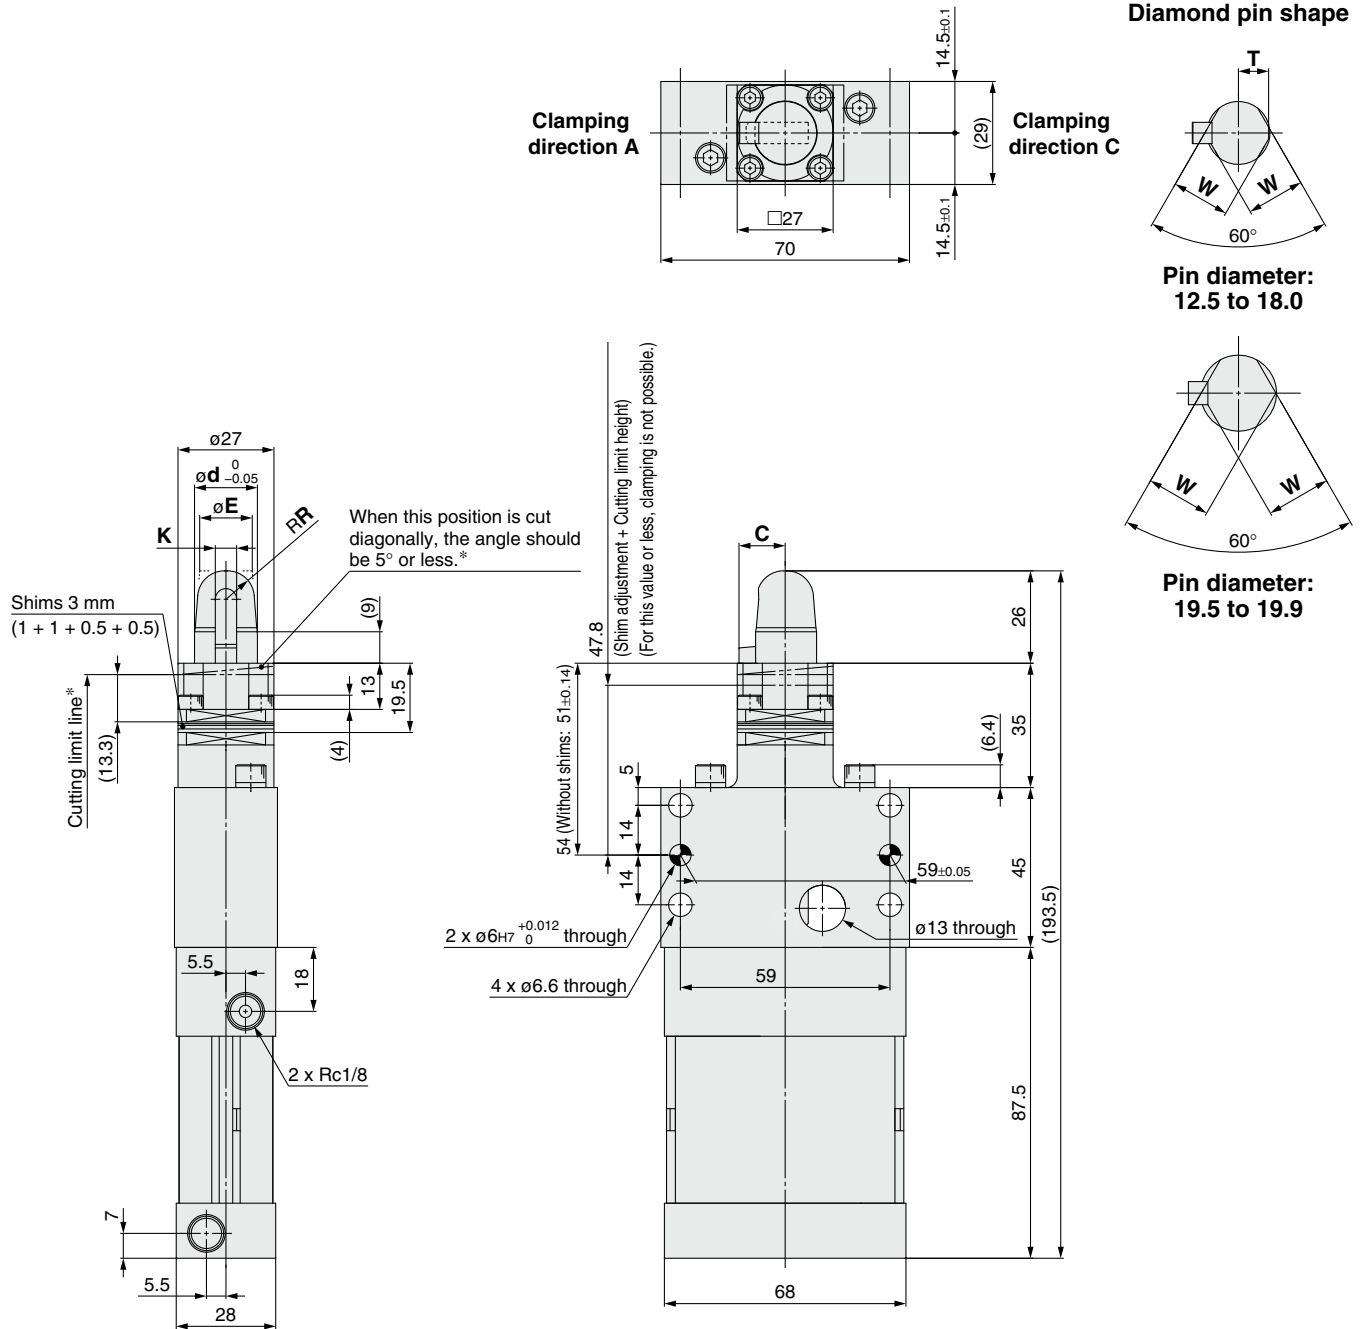

(mm)

Hole diameter of workpiece	Pin diameter	C	d	E	K	R	T	W	Symbol
ø13	12.5	8.5	12.5	10.4	5	5	6	11.6	125
	12.7		127						
	12.8		128						
	12.9		129						
	13.0		130						
ø18	17.5	13	17.5	14.8	6	7.5	8.5	16.4	175
	17.7		177						
	17.8		178						
	17.9		179						
	18.0		180						
ø20	19.5	13	19.5	15	6	7.5	—	16	195
	19.7		197						
	19.8		198						
	19.8		198						
	19.9		199						


\* The customer should regulate the dimensional accuracy associated with machining. If the cutting limit line is exceeded because of over-machining, clamping failures, etc. may occur and this is not covered by the warranty.

### Clamp arm position

<b>A</b>	Same as the port side
<b>C</b>	180° from the port side

## Dimensions

### CKU32 (Clamping height HIGH type)

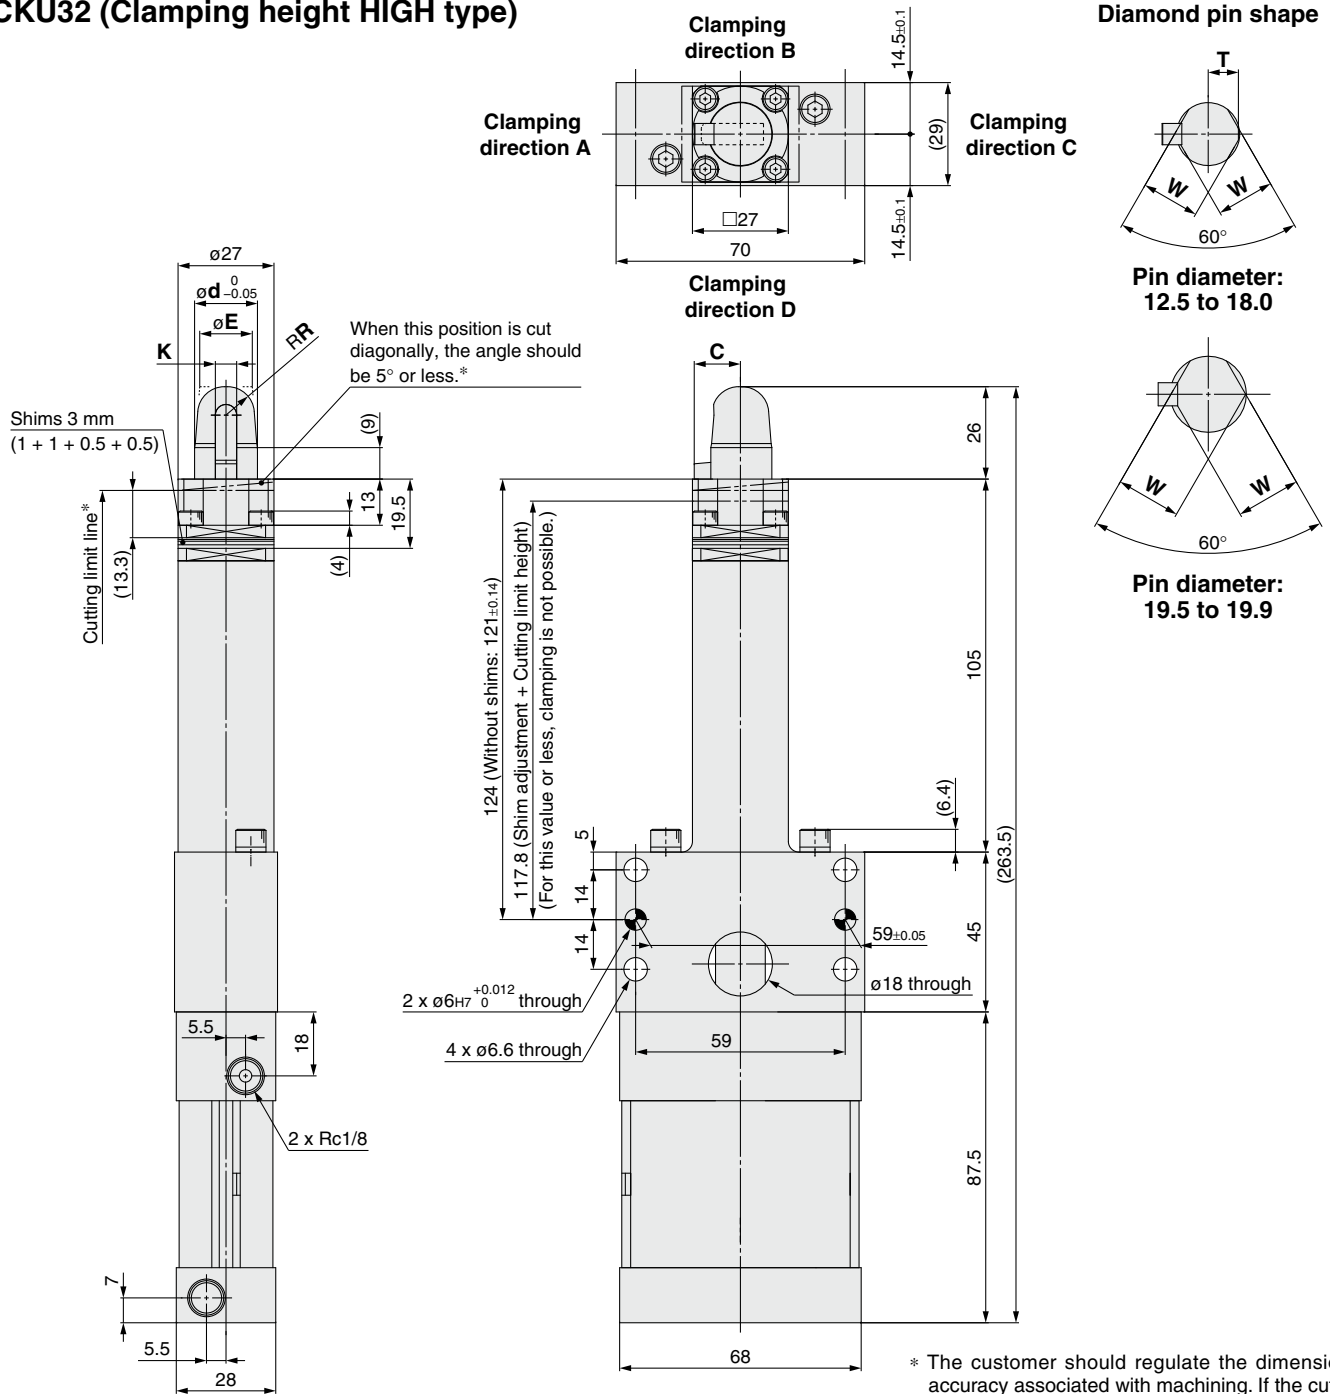


Hole diameter of workpiece	Pin diameter	C	d	E	K	R	T	W	Symbol
ø13	12.5	8.5	12.5	10.4	5	5	6	11.6	125
	12.7		127						
	12.8		128						
	12.9		129						
	13.0		130						
ø18	17.5	13	17.5	14.8	6	7.5	8.5	16.4	175
	17.7		177						
	17.8		178						
	17.9		179						
	18.0		180						
ø20	19.5	13	19.5	15	6	7.5	—	16	195
	19.7		197						
	19.8		198						
	19.8		198						
	19.9		199						

\* The customer should regulate the dimensional accuracy associated with machining. If the cutting limit line is exceeded because of over-machining, clamping failures, etc. may occur and this is not covered by the warranty.

### Clamp arm position


Position	Description
A	Same as the port side
B	90° from the port side
C	180° from the port side
D	270° from the port side

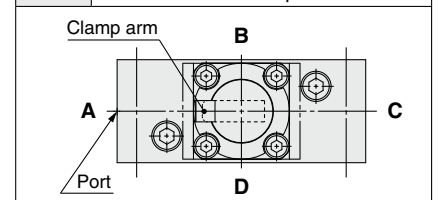

# C(L)KU32-X2359A

## Dimensions

### CLKU32 (Clamping height LOW type)

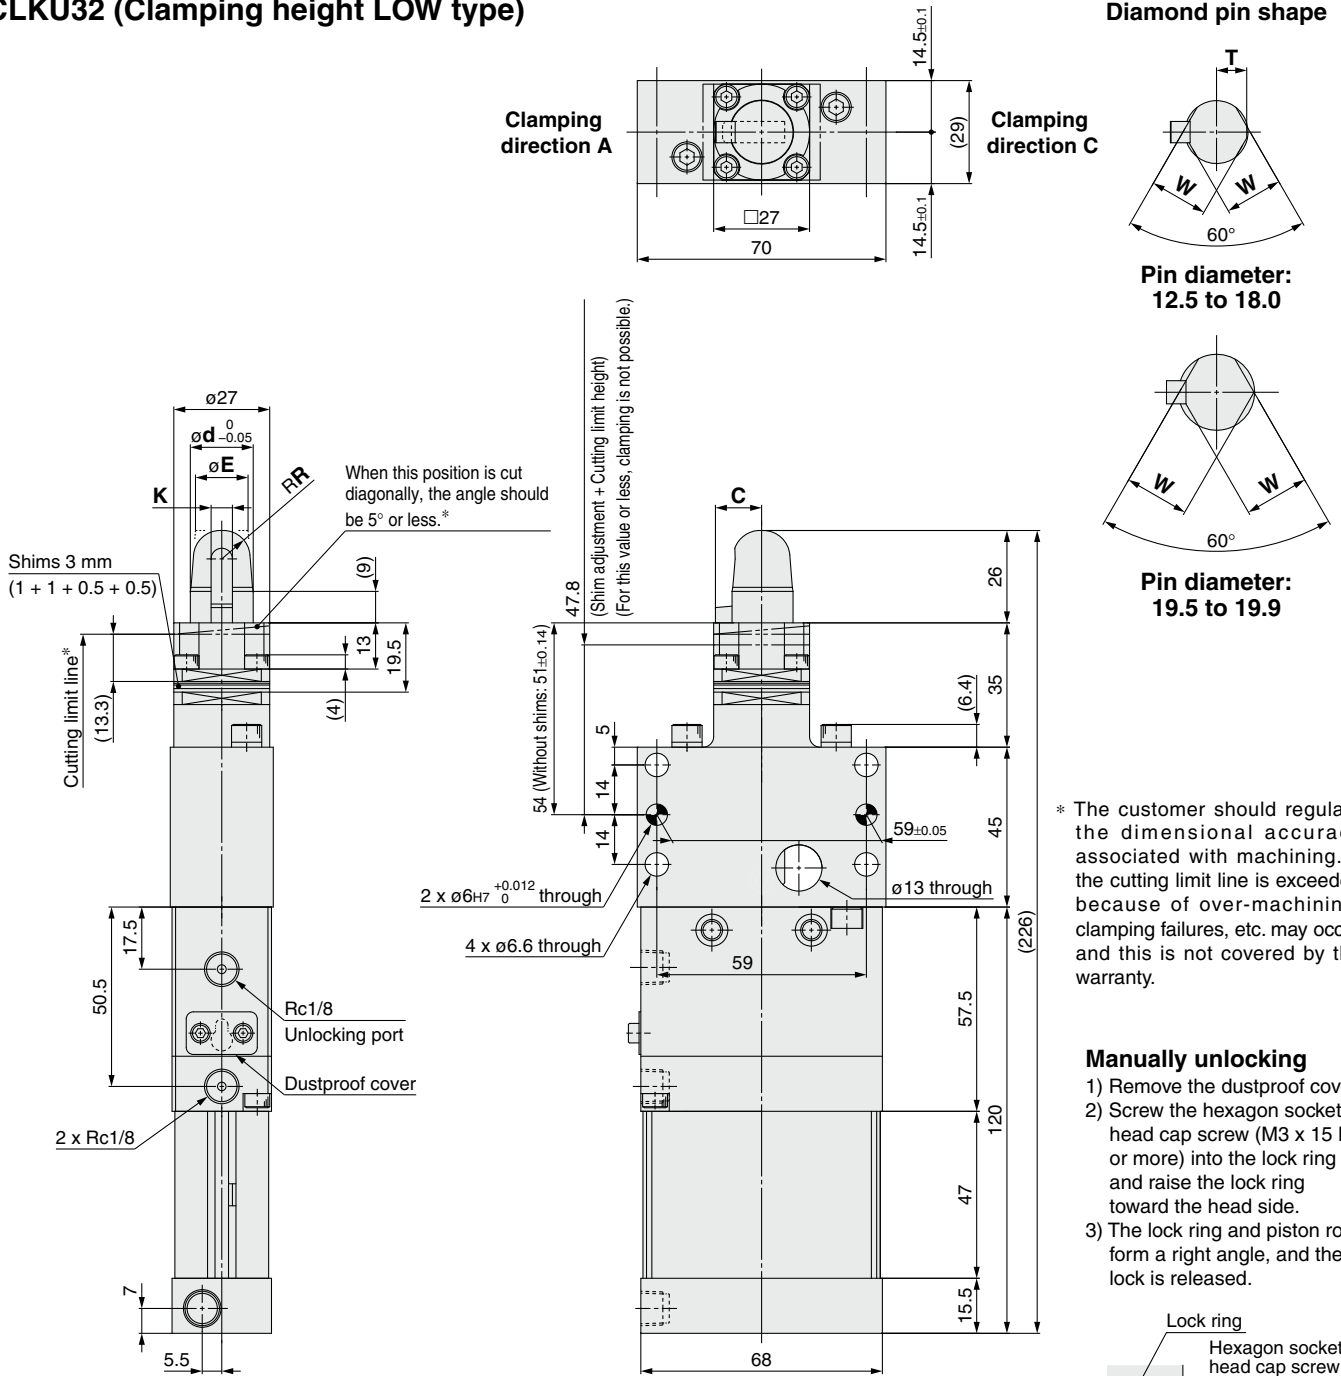

\* The customer should regulate the dimensional accuracy associated with machining. If the cutting limit line is exceeded because of over-machining, clamping failures, etc. may occur and this is not covered by the warranty.

- Manually unlocking**
- 1) Remove the dustproof cover.
  - 2) Screw the hexagon socket head cap screw (M3 x 15 L or more) into the lock ring and raise the lock ring toward the head side.
  - 3) The lock ring and piston rod form a right angle, and the lock is released.

### Clamp arm position


<b>A</b>	Same as the port side
<b>C</b>	180° from the port side

Hole diameter of workpiece	Pin diameter	C	d	E	K	R	T	W	Symbol
ø13	12.5	8.5	12.5	10.4	5	5	6	11.6	125
	12.7		127						
	12.8		128						
	12.9		129						
	13.0		130						
ø18	17.5	13	17.5	14.8	6	7.5	8.5	16.4	175
	17.7		177						
	17.8		178						
	17.9		179						
	18.0		180						
ø20	19.5	13	19.5	15	6	7.5	—	16	195
	19.7		197						
	19.8		198						
	19.8		198						
	19.9		199						




## Dimensions


### CLKU32 (Clamping height HIGH type)

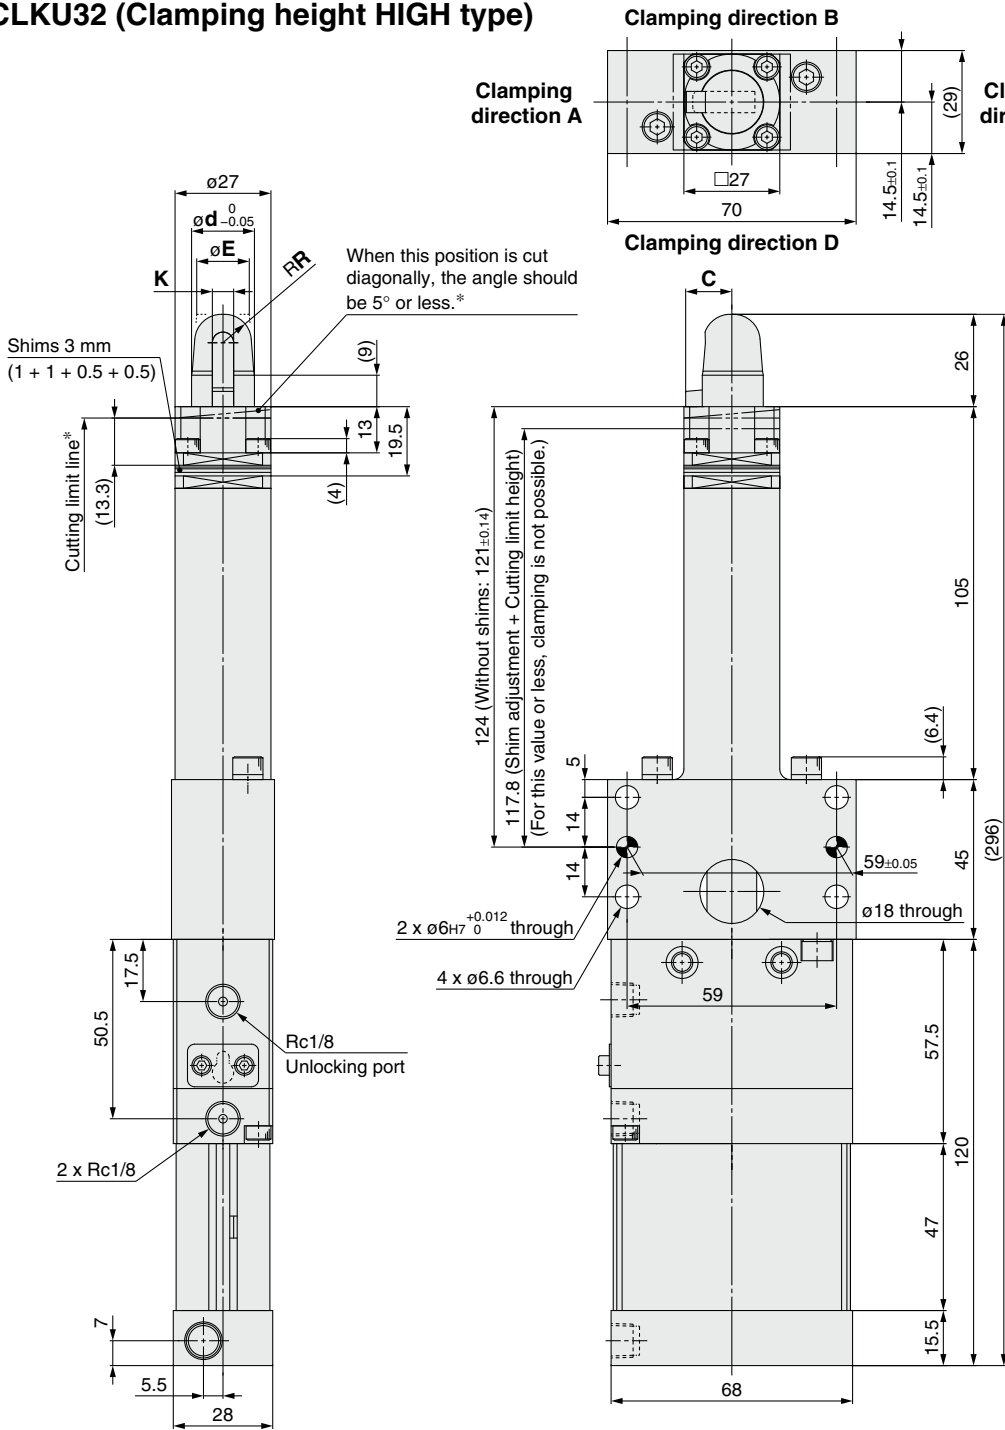

### Diamond pin shape



Pin diameter:  
12.5 to 18.0




Pin diameter:  
19.5 to 19.9

\* The customer should regulate the dimensional accuracy associated with machining. If the cutting limit line is exceeded because of over-machining, clamping failures, etc. may occur and this is not covered by the warranty.

### Manually unlocking


- 1) Remove the dustproof cover.
- 2) Screw the hexagon socket head cap screw (M3 x 15 L or more) into the lock ring and raise the lock ring toward the head side.
- 3) The lock ring and piston rod form a right angle, and the lock is released.



Hole diameter of workpiece	Pin diameter	C	d	E	K	R	T	W	Symbol
ø13	12.5	8.5	12.5	10.4	5	5	6	11.6	125
	12.7		127						
	12.8		128						
	12.9		129						
	13.0		130						
ø18	17.5	13	17.5	14.8	6	7.5	8.5	16.4	175
	17.7		177						
	17.8		178						
	17.9		179						
	18.0		180						
ø20	19.5	13	19.5	15	6	7.5	—	16	195
	19.7		197						
	19.8		198						
	19.8		198						
	19.9		199						

### Clamp arm position

Position	Description
A	Same as the port side
B	90° from the port side
C	180° from the port side
D	270° from the port side

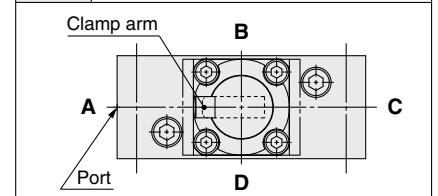


# C(L)KU32-X2359A

## Auto Switch Mounting

### Auto Switch Mounting Height

D-P3DWA□

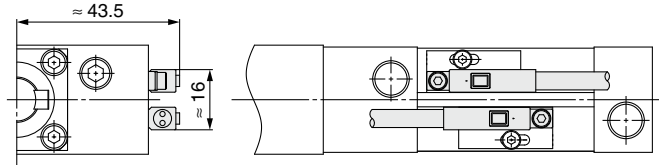

### Auto Switch Mounting Bracket Part No./Mounting Method

Applicable auto switches	D-P3DWA□	D-M9□V/M9□WV	D-A73/A79W
Bore size [mm]	ø32	ø32	ø32
Auto switch mounting bracket part no.	BMU4-040S	BMU1-025 (Below ①, ②) BQ2-012 (Below ③, ④)	BMU1-025
Auto switch mounting bracket fitting parts lineup/Weight	①Hexagon socket head cap screw (M3 x 4 L) ②Auto switch mounting nut ③Spring washer (M3) ④Auto switch mounting bracket Weight: 4 g	①Cross recessed round head screw (M3 x 6.5 L) ②Auto switch mounting nut ③Auto switch mounting bracket ④Round head combination screw (M2.5 x 6 L) Weight: 5 g	• Cross recessed round head screw (M3 x 6.5 L) • Auto switch mounting nut Weight: 2 g
Auto switch mounting surfaces	Surfaces with auto switch mounting slot  Without lock   With lock 	Surfaces with auto switch mounting slot 	Surfaces with auto switch mounting slot 
Mounting of auto switch	①Remove the screw (M2.5 x 12 L) attached to the auto switch temporarily. ②Insert the temporarily removed screw into the auto switch mounting bracket, and fix the bracket on the auto switch. ③Slide the auto switch mounting nut into the groove of the rail, and fix the auto switch mounting bracket on the cylinder with the hexagon socket head cap screw (M3 x 4 L) and spring washer (M3).  Note) The tightening torque for the hexagon socket head cap screw (M2.5 x 12 L) is 0.2 to 0.3 N·m. The tightening torque for the hexagon socket head cap screw (M3 x 4 L) is 0.5 to 0.7 N·m.   Hexagon socket head cap screw (attached to the auto switch) (M2.5 x 12 L) Hexagon socket head cap screw (M3 x 4 L) Spring washer Auto switch Auto switch mounting bracket Auto switch mounting nut Groove of rail	①Remove the set screw attached to the auto switch. (The set screw is not required.) ②Fix the auto switch to the auto switch mounting bracket with the round head combination screw (M2.5 x 6 L). ③Slide the auto switch mounting nut into the groove of the rail, and fix the auto switch mounting bracket on the cylinder with the cross recessed round head screw (M3 x 6.5 L).  Note) The tightening torque for the round head combination screw (M2.5 x 6 L) is 0.1 to 0.2 N·m and for the cross recessed round head screw (M3 x 6.5 L) is 0.5 to 0.7 N·m.   Set screw (Not required) M3 x 6.5 L M2.5 x 6 L Auto switch mounting bracket Auto switch Auto switch mounting nut Groove of rail	①Slide the auto switch mounting nut into the groove of the rail, and fix the auto switch on the cylinder with the cross recessed round head screw (M3 x 6.5 L).  Note) The tightening torque for the cross recessed round head screw (M3 x 6.5 L) is 0.5 to 0.7 N·m.   M3 x 6.5 L Auto switch mounting nut Groove of rail