


Pinch Valve




The fluid does not come into contact with the moving parts of the valve, so there is no inflow of contaminants. By discarding a tube after use, the need for a washing process is eliminated, thus ensuring good hygiene.

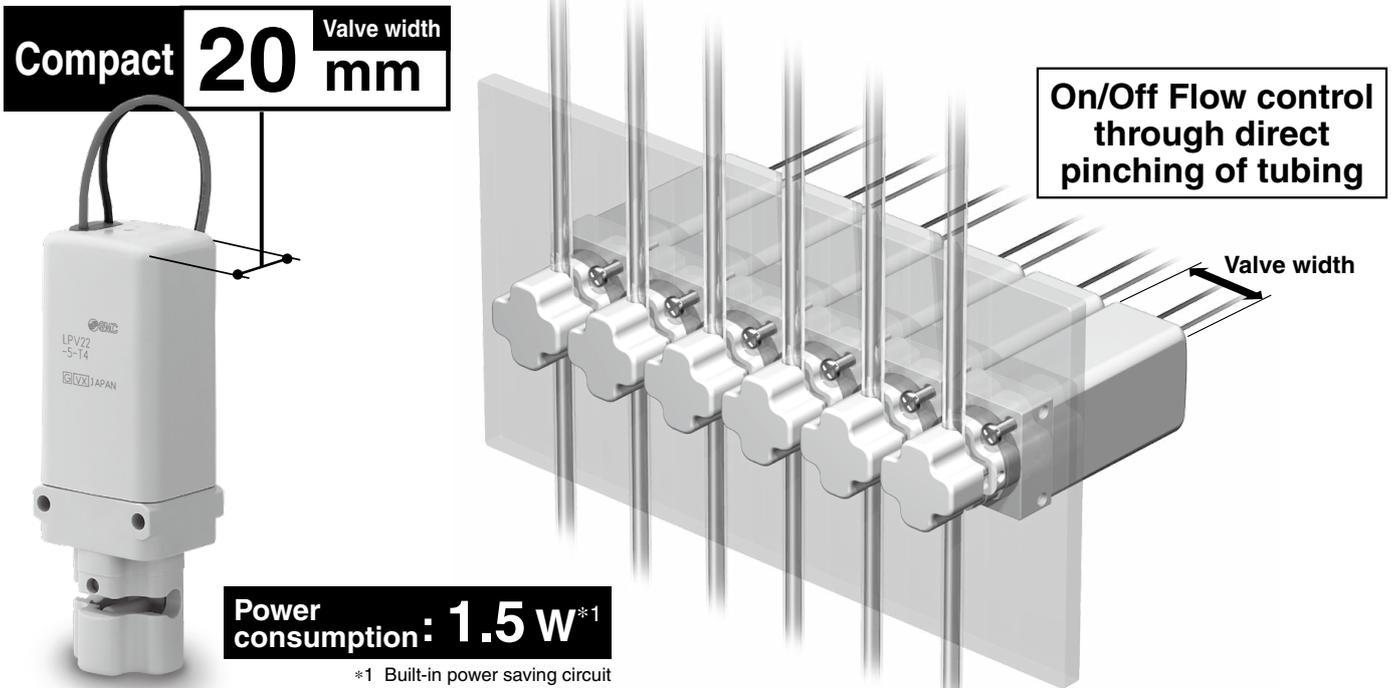

Improved tubing life

Less damage to the tube due to an arc shape of the tube clamp

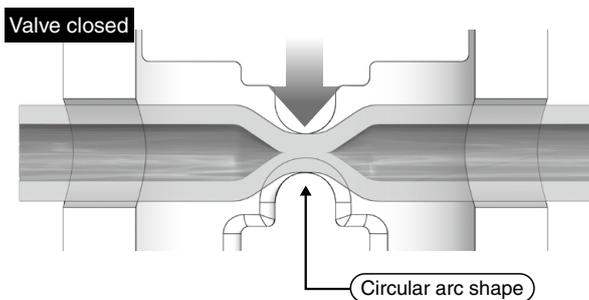


Easy tubing replacement

New

U shaped tube slot

Existing model


O shaped tube slot

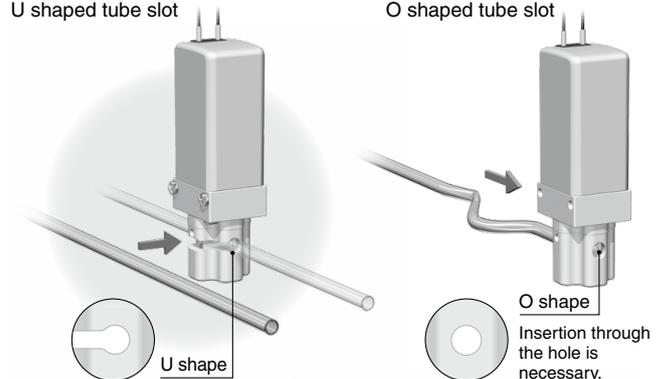

2 patterns of mounting


Panel mounting

Electrical faults due to scattering of liquid prevented by panels between the flow and coil sides

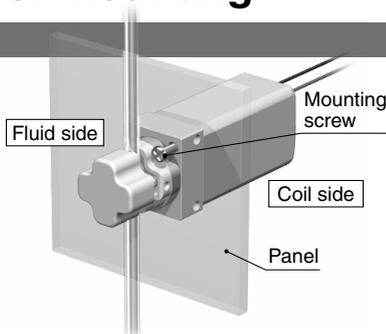

Direct mounting

Can be mounted from the front

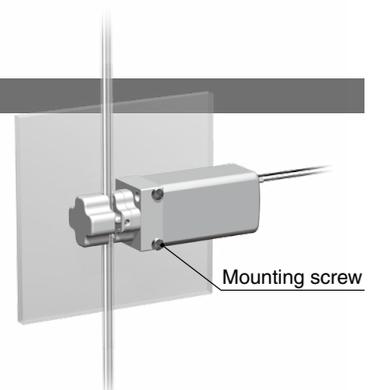

LPV22-X1



LPV22-X1



Specifications


Applicable tubing*1	Silicone O.D.: $\phi 4$ I.D.: $\phi 2$ O.D.: $\phi 5/32$ " I.D.: $\phi 1/32$ "
Type of actuation	Direct operated solenoid
Valve type	N.O.
Rated voltage	24/12 VDC
Allowable voltage fluctuation	$\pm 10\%$ of the rated voltage
Power consumption	Starting: 8 W Holding: 1.5 W [Built-in power saving circuit]
Ambient temperature	0 to 50°C
Operating pressure	0 to 0.2 MPa
Impact/Vibration resistance m/s²*2	150/30
Enclosure	IP40 equivalent

*1 Silicone tubing should be provided by the customer.

*2 Impact resistance: No malfunction occurred when it is tested in the axial direction and at the right angles to the armature in both energized and de-energized states every once for each condition. (Value in the initial state)

Vibration resistance: No malfunction occurred in one sweep test between 45 and 2000 Hz in the axial direction and at the right angles to the main valve and armature in both energized and de-energized states for each condition. (Value in the initial state)

Dimensions

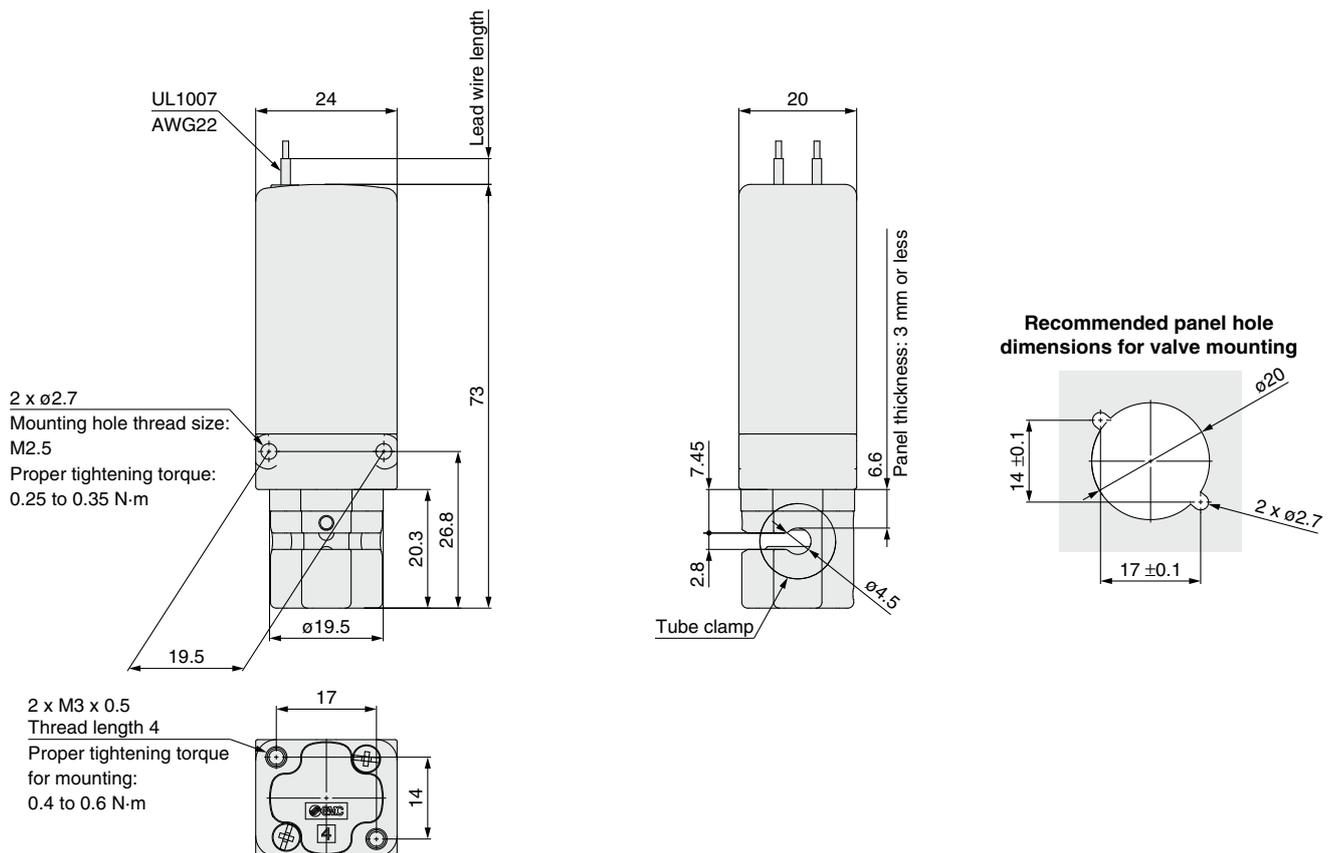

⚠ Safety Instructions Be sure to read the "Handling Precautions for SMC Products" (M-E03-3) and "Operation Manual" before use.

SMC Corporation

Akihabara UDX 15F,
4-14-1, Sotokanda, Chiyoda-ku, Tokyo 101-0021, JAPAN
Phone: 03-5207-8249 Fax: 03-5298-5362
<https://www.smcworld.com>
© 2020 SMC Corporation All Rights Reserved

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.